

# SELECTION GUIDE



**FRENIC-VG**



**FRENIC-HVAC**  
**FRENIC-AQUA**



**FRENIC-Ace-H**



**FRENIC-Mini**

## FREQUENCY INVERTERS

Fuji Electric Europe



**FRENIC-MEGA**



**FVR-Micro**



**FRENIC-Ace**



**FRENIC-Lift**

## Fuji Electric, a renowned manufacturer of power electronics, drive engineering and automation technology

Founded in 1987, Fuji Electric Europe has long been a trusted partner, supplying frequency inverters and power electronics to customers in Europe, Russia, Africa and the Middle East. Our outstanding reputation is based on reliable quality, excellent product performance and innovating technology.

In recent years, more and more new applications such as wind and solar power and electrically powered cars have evolved in the renewable energies sector.



The precision control of Fuji Electric inverters allows AC drives to operate at an optimal speed throughout your application, reducing overall power and energy consumption to minimize operating costs.

Fuji Electric meets these new challenges with economically viable custom solutions, combining newest technology and know-how with high efficiency, reliability and long life.

Our wide product range is supported by an excellent global logistic network and has a solution for every problem.



Visit us on [www.fujielectric-europe.com](http://www.fujielectric-europe.com)

Applications for our drives and inverters include conveyor systems, water, HVAC and lift applications, and others. The FRENIC-Series is equipped with functions and performance to meet all types of requirements, providing easy maintenance, energy and cost saving and environmental friendliness.

In this Selection Guide, you will find Fuji Electric Europe's Low Voltage Inverters and their supplements.

In this Selection Guide for Fuji Electric's Low Voltage Drives Products, you will find all our main series of frequency inverters in one booklet.

The Selection Guide makes it easy to find the matching product for your requirements: look into the overview tables for applications, check the capacity ranges and option availabilities, and find out about the specifications of our FRENIC-Series.

For knowing more about each product,  
find Drive & Automation products on our website  
[www.fujielectric-europe.com](http://www.fujielectric-europe.com)  
or ask your local Fuji Electric Sales Representative.

## Our FRENIC Series

*page*

Applications .....	5
Options .....	6
Capacity Range .....	7
Specifications .....	8
FRENIC-Mini C2 .....	11
FRENIC-AQUA AQ1 .....	12
FRENIC-HVAC AR1 .....	13
FRENIC-Ace-H E2H .....	14
FVR-Micro AS1S .....	15
FRENIC-Ace E2 .....	16
FRENIC-Ace for Solar Pumping .....	17
FRENIC-MEGA G1 .....	18
FRENIC-Lift LM2A .....	19
FRENIC-VG unit type VG1 .....	20
FRENIC-VG stack type VG1 .....	21

### SUPPLEMENTS

PWM Converter: RHF-D Series .....	22
PWM Converter: RHC-D Series .....	23
HMI: MONITOUCH V9 Series .....	24
HMI: MONITOUCH TECHNOSHOT Series .....	25
Cabinet Solution .....	26



# Extended Warranty Periods



**Relax.  
You have a Fuji.**




*3 to 5 years warranty on all drive products from Fuji Electric.  
Now applied.*






# APPLICATIONS

Applications		FRENIC-AQUA	FRENIC-HVAC	FRENIC-Ace-H	FRENIC-MEGA	FRENIC-Lift	FVR-Micro	FRENIC-Ace	FRENIC-Mini C2	FRENIC-VG1
Fans	Exhaust fan		•	•						
	AHU (air handling unit)		•	•						
	Compressor		•	•	•			•	•	•
	Air-conditioning system		•	•	•		•	•	•	
	Dryer		•	•	•		•	•	•	
	Boiler fan		•	•	•			•	•	
	Fans for controlling furnace temperature		•	•	•			•	•	
	Roof fans controlled as a group		•	•	•		•	•	•	
	Refrigerator		•	•	•			•	•	•
	Built-in blower in film-manufacturing machines	•	•	•	•			•	•	
	Cooling-tower fan		•	•	•			•	•	
	Ventilating fan		•	•	•		•	•	•	
	Separator fan		•	•	•			•	•	
Machine Tools	Grinding machine									•
	Polishing machine									•
	Milling machine									•
	Lathe									•
	Boring machine							•	•	•
	Turntable				•			•	•	•
	Work positioning unit				•			•	•	•
	PCB drilling machine				•			•	•	•
	Winding machine				•			•	•	•
	Press				•			•	•	•
	Electric Pumps	Chillers	•	•	•	•				•
Drinking water supply		•	•	•					•	
Tankless water-supply system		•		•				•	•	
Submersible pump		•		•	•			•	•	
Vacuum pump		•		•	•			•	•	•
Fountain pump		•		•	•			•	•	
Cooling water pump		•		•	•			•	•	
Circulating hot water pump		•		•	•			•	•	
Well pump		•		•	•			•	•	•
Irrigation		•		•	•			•	•	•
Water treatment system		•		•	•			•	•	
Constant-flow pump		•		•	•			•	•	•
Sludge pump		•			•			•	•	
Solar pumping				•			•	•		
Conveyance machinery	Cranes (travelling, traversing, hoisting)	•	•		•			•		•
	Automated warehouse				•			•	•	•
	Conveyor (belt, chain, screw, roller)				•		•	•	•	•
	Lift				•	•		•		•
	Car parking system				•			•		•
	Elevator, escalator				•	•		•		•
	Automatic door				•			•	•	•
	Shutter				•			•	•	•
Chemical machinery / wood working machines	Fluids mixing machine				•			•	•	•
	Extruder				•			•	•	•
	Vibrator				•			•	•	•
	Centrifugal separator				•		•	•	•	•
	Coating machine				•			•	•	•
	Take-up roller				•			•	•	•
	Router machine				•			•	•	•
Packaging machinery	Individual packing / inner packing				•		•	•	•	•
	Packing machine				•		•	•	•	•
	Outer packing machine				•			•	•	•
Food processing machinery	Food mixer				•			•	•	•
	Food slicer				•			•	•	•
	Grain processing machine				•		•	•	•	•
	Tea manufacturing machine				•			•	•	•
	Rice milling machine				•			•	•	•
Paper making / textile machinery	Rice sorters				•		•	•	•	•
	Spinning machine				•			•	•	•
	Knitting machine				•			•	•	•
	Textile printing machine				•			•	•	•
	Industrial sewing machine				•			•	•	•
Other machinery	Synthetic fiber manufacturing plant									•
	Slitters				•			•	•	•
	Automated food / medicine blending machine				•			•	•	•
	Commercial-use washing machine				•			•	•	•
	Offset printing press				•			•	•	•
	Bookbinding machine				•			•	•	•
	Car washing machine				•		•	•	•	•
	Shredder				•		•	•	•	•
	Food washing machine				•			•	•	•
	Test equipment				•			•	•	•
Crushers				•			•	•	•	
Air curtains / window shades / kitchen ventilating fans						•		•		

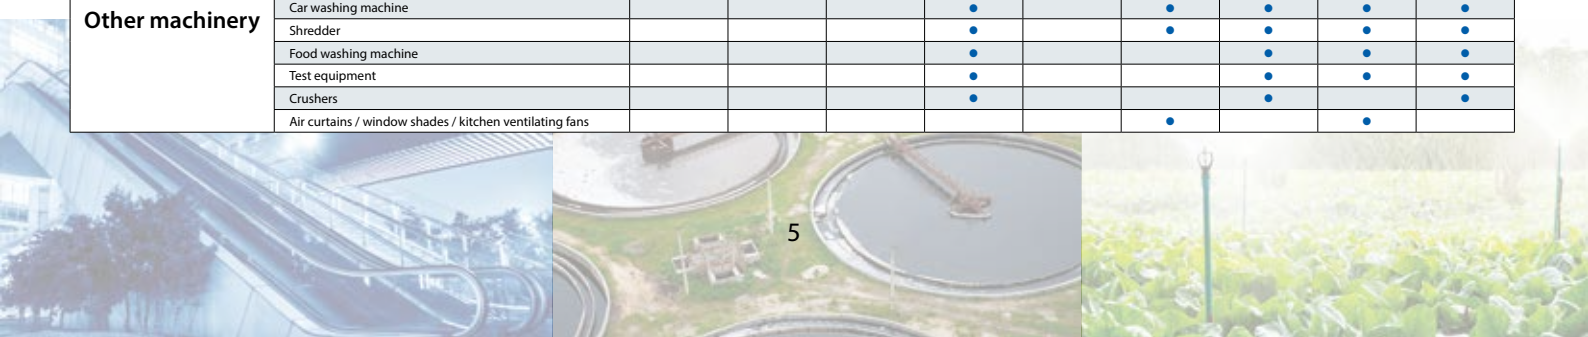

# OPTIONS

Options		FRENIC-AQUA	FRENIC-HVAC	FVR-Micro	FRENIC-Mini	FRENIC-MEGA	FRENIC-ACE	FRENIC-Ace-H	FRENIC-Lift	FRENIC-VG1
Fieldbus Options	CC-Link communication card	•	•			•	•	•		•
	DeviceNet communication card	•	•			•	•	•		•
	PROFIBUS DP communication card	•	•			•	•	•		•
	CANopen communication card	•	•			•	•	•		
	LonWorks communication card	•	•							
	Ethernet communication card	•	•			•	•	•		
	T-Link communication card					•				•
	SX bus communication card					•				•
	E-SX bus communication card									•
	PROFINET-RT communication card					•	•	•		
	PROFINET-IRT communication card									•
	High-Speed serial communication card (for UPAC)									•
	Terminal block for high speed communication									•
Other Options	Battery	•	•							•
	Relay output interface card	•	•			•		•		
	Analog input interface card	•	•							
	Analog current output interface card	•	•							
	Pt100 temperature sensor input card	•	•					•		
	Additional analog input/output card					•	•	•		•
	Additional digital input/output card						•	•		•
	Additional digital input card					•				•
	Additional digital output card					•				
	Analog output (x 2ch)					•				
	PG (encoder) interface 12-15V HTL					•	•		•	
	PG (encoder) interface 5V TTL line driver					•			•	•
	PG (encoder) interface 5V TTL (not line driver)						•			
	PG (encoder) interface 5V TTL (not line driver) for synchronous operation									
	Gray Code / switching signals 5V TTL line driver encoder interface								•	
	RS-485 option with 2RJ45 connectors for branch connection						•			
	RS-485 communication interface									
	RS-485 option cage clamp terminal									
	Pulse output divider card								•	
	SinCos, SinCos encoder interface								•	
	SinCos, EnDat 2.1 encoder interface								•	
	Hiperface encoder interface								•	
	SSI encoder interface								•	
	Biss encoder interface								•	
	Synchronized interface									•
	F/V converter									•
	User programming card									•
	Functional safety card									•
	PG interface card / Open collector									•
	PG interface card / ABS encoder with 17-bit high resolution									•
PG card for synchronous motor drive / Open collector									•	
PG card for synchronous motor drive / Line driver									•	

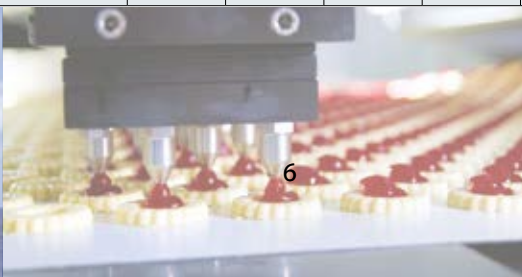


# CAPACITY RANGE

Applicable standard motor (kW)	FRENIC-AQUA 3-phase 400 VAC	FRENIC-HVAC 3-phase 400 VAC	FRENIC-MEGA 3-phase 400 VAC 3-phase 200 VAC	FRENIC-Lift 3-phase 400 VAC 1-phase 200 VAC	FRENIC-Ace / FRENIC-Ace-H 3-phase 400 VAC 1-phase 200 VAC	FRENIC-Mini 3-phase 400 VAC 1-phase 200 VAC	FRENIC-VG (unit) 3-phase 400 VAC 3-phase 200 VAC	FRENIC-VG (stack) 3-phase 400 VAC 3-phase 690 VAC	FVR-Micro 3-phase 400 VAC 1-phase 200 VAC
0.1					0.1	0.1			
0.2									
0.4			0.4	0.4	0.4	0.4			0.4
0.75	0.75	0.75					0.75		0.75
1.5									
2.2				2.2	2.2	2.2			2.2
4.0				4.0			4.0		4.0
5.5					*	*			
7.5									
11									
15						15			
18.5									
22									
30								30	
37									
45				45					
55									
75									
90			90				90	90	
110									
132									
160									
200									
220					220				
250									
280									
315									
355									
400								*	*
450								450	
500									
560									
630			630				630		
710	710	710						*	*
800								800	*

More capacities up to 3 MW available in dual rating and multi drive system.



3-phase 400 VAC, 5.5 to 15 kW, w/o EMC-filter built-in

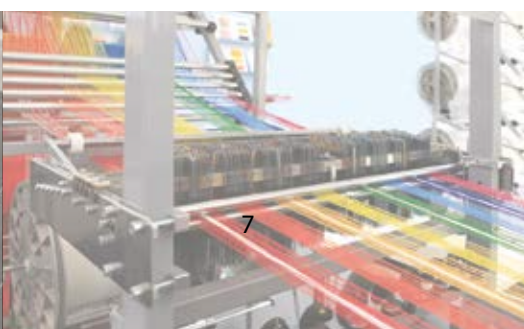



# SPECIFICATIONS

			FRENIC-AQUA (AQ1)	FRENIC-HVAC (AR1)	FRENIC-Ace-H (E2H)	FRENIC-Mini (C2)
Input ratings	Phase, Voltage, Frequency	3-phase 400 VAC	380 to 440 VAC, 50 Hz / 390 to 480 VAC, 60 Hz	380 to 440 VAC, 50 Hz / 390 to 480 VAC, 60 Hz	380 to 480 VAC, 50/60 Hz	380 to 480 VAC, 50/60 Hz
		3-phase 200 VAC	---	---	200 to 240 VAC, 50/60 Hz	---
	1-phase	---	---	200 to 240 V, 50/ 60 Hz	200 to 240 VAC, 50/60 Hz	
Variations		Voltage: +10 to -15% (voltage unbalance: 2% or less), frequency: +5 to -5%	Voltage: +10 to -15% (voltage unbalance: 2% or less), frequency: +5 to -5%	Voltage: +10 to -15%, voltage unbalance: 2% or less / frequency: +5 to -5%	Voltage: +10 to -15%, voltage unbalance: 2% or less (3-phase, 400 VAC) / +10 to -10% (1-phase, 200 VAC), frequency: +5 to -5%	
Output overload capability		110% -1 min (Overload tolerated interval: compliant with IEC 61800-2)	110% -1 min (Overload tolerated interval: compliant with IEC 61800-2)	150% of rated current for 1 min (HHD) (HD), 120% of rated current for 1 min (ND) (HND), 200% of rated current for 3 seconds (HHD)	150% of rated current for 1 min or 200% of rated current for 0.5 s	
Output frequ. setting	Maximum frequency	25 to 120 Hz	25 to 120 Hz	HHD/HND/HD mode: 25 to 500 Hz variable under V/control, Magnetic pole position sensorless vector control // up to 200 Hz under vector control with speed sensor // ND mode: 25 to 120 Hz (under any drive control)	25 to 400 Hz	
	Base frequency	25 to 120 Hz	25 to 120 Hz	25 to 500 Hz variable (in conjunction with max. frequency)	25 to 400 Hz	
	Starting frequency	0.1 to 60.0 Hz	0.1 to 60.0 Hz	0.1 to 60.0 Hz variable	0.1 to 60.0 Hz	
	Carrier frequency	0.75 to 16 kHz	0.75 to 16 kHz	3-phase 200 VAC: FRN0030/0040/0056/0069E□-2□: 0.75 to 16 kHz variable (HHD/HND mode) // 3-phase 400 VAC: FRN0022/0029/0037/0044/00592□S-4□: 0.75 to 16 kHz variable (HHD/HND/HD mode), 0.75 to 10 kHz variable (ND mode) // FRN0072/0085/0105/0139/0168E□-4□: 0.75 to 16 kHz variable (HHD mode), 0.75 to 10 kHz variable (HND/HD mode), 0.75 to 6 kHz variable (ND mode) // FRN0203E□-4□ or above: 0.75 to 10 kHz variable (HHD mode), 0.75 to 6 kHz variable (HND/HD/ND mode)	0.75 to 16 kHz Note: the unit is equipped with an automatic reduction/stop function that may automatically drop the carrier frequency to protect the inverter when it is running at frequencies above 6 kHz, depending on ambient temperature, output current, and other conditions. <sup>1</sup> Under modulated carrier conditions, the system scatters carrier frequency to reduce noise.	
Starting torque		100% or higher, reference frequency 1.0 Hz, base frequency 50 Hz, with slip compensation and torque boost active	100% or higher, reference frequency 1.0 Hz, base frequency 50 Hz, with slip compensation and torque boost active	3-phase 200 VAC series: 200% or above, reference frequency 0.5 Hz (HHD FRN0069E□-2□ or below), 150% or above, ref. frequency 0.5 Hz (HND FRN0069E□-2□ or below), 3-phase 400 VAC series: 200% or above, ref. frequency 0.5 Hz (HHD FRN0072E□-4□ or below), 150% or above, ref. frequency 0.5 Hz (HHD FRN0085E□-4□ or above), 120% or above, ref. frequency 0.5 Hz (HND/ND), 150% or above, ref. frequency 0.5 Hz (HD), Base frequency 50 Hz, with slip compensation and auto torque boost active	150% or more / frequency set to 3 Hz Slip compensation / automatic torque boost active	
Brake	Standard torque (%) <sup>6</sup>		20 (0.75 to 22 kW), 10 to 15 (30 to 710 kW)	20 (0.75 to 22 kW), 10 to 15 (30 to 710 kW)	For details, please refer to the user's manual of FRENIC-Ace-H.	For details, please refer to the user's manual of FRENIC-Mini.
	DC injection braking	Starting frequency	0.0 to 60.0 Hz	0.0 to 60.0 Hz	0.0 to 60.0 Hz	0.0 to 60.0 Hz
		Braking time	0.0 to 30.0 s	0.0 to 30.0 s	0.0 to 30.0 s	0.0 to 30.0 s
Braking level		0 to 60%	0 to 60%	0 to 100%	0 to 100%	
Control method		V/f control with slip compensation, dynamic torque vector control, PMSM	V/f control with slip compensation, dynamic torque vector control, PMSM	Induction motor drive: V/f control - Vector control without speed sensor (Dynamic torque vector) - V/f control, with slip compensation - / Synchronous motors: Vector control without magnetic pole position sensor	Induction motor drive: V/f control, slip compensation, automatic torque boost, dynamic torque vector control // Synchronous motor drive: synchronous magnetic positioning (speed control range: 10% of base frequency and up)	
Acceleration/deceleration time		0.00 to 3600 s	0.00 to 3600 s	0.00 to 3600 s	0.00 to 3600 s	
Multistep frequency		Selectable from 16 steps (step 0 to 15)	Selectable from 16 steps (step 0 to 15)	16 steps	Selectable from 16 steps (step 0 to 15)	
Frequency setting control (analog input)		0 to +10 V DC / 0 to 100% (terminal 12) 4 to +20 mA DC / 0 to 100%, 0 to +20 mA DC / 0 to 100% (terminal C1)	0 to +10 V DC / 0 to 100% (terminal 12) 4 to +20 mA DC / 0 to 100%, 0 to +20 mA DC / 0 to 100% (terminal C1)	Term [12]: 0 to ±10 VDC (±5 VDC) / 0 to ±100%, 0 to +10 VDC (+5 VDC) / 0 to +100% // Term [C1] C1 function: 4 to 20 mA DC / 0 to +100% / 0 to ±100%, 0 to 20 mA DC / 0 to +100% / 0 to ±100% // Term [C1] V2 function: 0 to +10 VDC (+5 VDC) / 0 to +100% / 0 to ±100%, inverse function available (20 to 4; 20 to 0)	0 to +10 V DC / 0 to 100% (terminal 12) 4 to +20 mA DC / 0 to 100%, 0 to +20 mA DC / 0 to 100% (terminal C1)	
Standard functions		<ul style="list-style-type: none"> <li>Fire mode (forced operation)</li> <li>Customized logic</li> <li>Multi pump control</li> <li>Real time clock</li> </ul>	<ul style="list-style-type: none"> <li>4 PID control</li> <li>Motor pick up function</li> <li>Customized logic</li> <li>Filter clogging prevention</li> <li>Real time clock</li> </ul>	Customizable logic, 2 PID Control, Fire mode (forced operation), multi pump control, Auto-tuning, Online tuning, 1st and 2nd motor settings, Cooling fan ON/OFF control, Speed control, Pre-excitation, DC Braking, Droop control	PID control function, sensorless synchronous motor control, RS 485 communication port, braking signal function, motor switching function, motor auto-tuning, high starting torque, at 150% or more, braking resistor connectable to the inverter, tripless deceleration by automatic deceleration control, automatic energy-saving function, frequency setting potentiometer	
Protection		<ul style="list-style-type: none"> <li>Short-circuit</li> <li>Ground fault</li> <li>Overvoltage</li> <li>Undervoltage</li> <li>Motor overload (PTC)</li> </ul>	<ul style="list-style-type: none"> <li>Short-circuit</li> <li>Ground fault</li> <li>Overvoltage</li> <li>Undervoltage</li> <li>Motor overload (PTC)</li> </ul>	Overcurrent (short-circuit, ground fault), Overvoltage, Incoming surge, Undervoltage, Input phase loss, Overheating, Motor overload (Electronic thermal overload trip), Stall prevention, External alarm input, Memory error, Communication error, (KEYPAD, Option, RS-485), CPU error, Option error, Output phase loss error	Overcurrent, short-circuit, ground fault, overvoltage, undervoltage, input phase loss, output phase loss, inverter overheat, braking resistor overheat, overload, motor electronic thermal overload relay, PTC thermistor, motor overload early warning, stall prevention, step-out detection, external alarm input, memory error, remote keypad (option), communications error, CPU error, operation error, tuning error, RS-485 communications error, data save error during undervoltage, surge protection, protection against momentary power failure, overload prevention control, mock alarm, PID feedback wire break detection	
Enclosure (IEC/EN60529)		IP21/IP55 (0.75 to 90 kW), IP00 (110 to 710 kW)	IP21/IP55 (0.75 to 90 kW), IP00 (110 to 710 kW)	IP20 closed type, UL open type (22 kW or smaller), IP00 open type, UL open type (30 kW or larger)	IP20 (IEC 60529:1989) / UL open type (UL50)	
Cooling method		Natural cooling (0.75 to 2.2 kW), Fan cooling (4.0 to 710 kW)	Natural cooling (0.75 to 2.2 kW), Fan cooling (4.0 to 710 kW)	Fan cooling	3-phase 400 VAC: natural cooling (0.4/0.75 kW), fan cooling (1.5 to 15 kW); 1-phase 200 VAC: natural cooling (0.1 to 0.75 kW), fan cooling (1.5/2.2 kW)	
Conformed standard		EC Directive (CE marking) <sup>2</sup> , UL standard (cUL certification) <sup>3</sup> EAC <sup>4</sup> , STO	EC Directive (CE marking) <sup>2</sup> , UL standard (cUL certification) <sup>3</sup> EAC <sup>4</sup> , STO	EC Directive (CE marking) <sup>2</sup> , UL standard (cUL certification) <sup>3</sup> , EAC <sup>4</sup> , STO <sup>5</sup>	EC Directive (CE marking) <sup>2</sup> , UL standard (cUL certification) <sup>3</sup> , EAC <sup>4</sup>	

1 Non EMEA standard product.  
2 EMC Directive: EN61800-3 / Low Voltage Directive: EN61800-5-1  
3 GOST-R, GOST-K, GOST-B  
4 UL508, C22.2 No 14

5 Functional Safety: EN61800-5-2: SIL2, ISO13849-1, SIL2, PL=d, cat. 3, Safe torque off, stop cat. 0  
6 Ratings applicable when no optional braking resistor is installed.  
7 With dynamic torque-vector control selected.

# SPECIFICATIONS

			FVR-Micro (A1S1)	FRENIC-Ace (E2)	FRENIC-MEGA (G1)	FRENIC-Lift (LM2A)
Input ratings	Phase, Voltage, Frequency	3-phase 400 VAC	280 to 480 VAC, 50/60 Hz	380 to 480 VAC, 50/60 Hz	380 to 480 VAC, 50/60 Hz (up to 55 kW) 380 to 440 VAC, 50 Hz 380 to 480 VAC, 60 Hz (75 kW or above)	380 to 480 VAC, 50/60 Hz
		3-phase 200 VAC	--	200 to 240 VAC, 50/60 Hz	200 to 240 VAC, 50/60 Hz (up to 22 kW) 200 to 220 VAC, 50 Hz, 200 to 230 VAC, 60 Hz (30 kW & above)	---
		1-phase	200 to 240 VAC, 50/60 Hz	200 to 240 V, 50/60 Hz	--	200 to 240 VAC, 50/60 Hz
	Variations	400 V series Voltage: -15% to +10% Frequency: 47 to 63 Hz	Voltage: +10 to -15%, voltage unbalance: 2% or less / Frequency: +5 to -5%	Voltage: +10 to -15%, voltage unbalance: 2% or less / Frequency: +5 to -5%	Voltage: +10 to -15%, voltage unbalance: 2% or less / Frequency: +5 to -5%	Voltage: +10 to -15%, Frequency: -5 to +5% Voltage unbalance for 3-phase: 2% or less according to IEC61800-3
Output overload capability			150% of rated current during 1 minute	150% of rated current for 1 min (HHD) (HD) 120% of rated current for 1 min (ND) (HND) 200% of rated current for 3 seconds (HHD)	150% of rated current for 1 min (HD) (MD) 120% of rated current for 1 min (LD) 200% of rated current for 3 seconds (HD)	200% for 3 sec
Output frequency setting	Maximum frequency		25.0 to 400 Hz	HHD/HND/HD mode: 25 to 500 Hz variable under V/f control, Magnetic pole position sensorless vector control (Up to 200 Hz under vector control with speed sensor) ND mode: 25 to 120 Hz (under any drive control)	25 to 500 Hz (120 Hz for inverters in MD/LD mode)	1 to 200 Hz (1.20 to 12000 rpm)
	Base frequency		25.0 to 400 Hz	25 to 500 Hz variable (in conjunction with max. freq.)	25 to 500 Hz variable (in conjunction with max freq.)	1 to 200 Hz (1.20 to 12000 rpm)
	Starting frequency		0.0 to 60.0 Hz	0.1 to 60.0 Hz variable (0.0 Hz under vector control with speed sensor)	0.1 to 60 Hz variable setting	Dynamic torque vector control: 0.1 Hz Vector control with PG: 0.0 Hz
	Carrier frequency		0.75 to 16 kHz	3-phase 200 VAC: FRN0030/0040/0056/0069E□-2□: 0.75 to 16 kHz variable (HHD/HND mode) // 3-phase 400 VAC: FRN0022/0029/0037/0044/00592□3-4□: 0.75 to 16 kHz variable (HHD/HND/HD mode), 0.75 to 10 kHz variable (ND mode) // FRN0072/0085/0105/0139/0168E□-4□: 0.75 to 16 kHz variable (HHD mode), 0.75 to 10 kHz variable (HND/HD mode), 0.75 to 6 kHz variable (ND mode) // FRN0203E□-4□ or above: 0.75 to 10 kHz variable (HHD mode), 0.75 to 6 kHz variable (HND/HD/ND mode)	0.1 to 60 Hz variable setting - 0.75 to 16 kHz (HD mode): 0.4 to 55 kW, LD mode: 5.5 to 18.5 kW 0.75 to 10 kHz (HD mode: 75 to 400 kW, LD mode: 22 to 55 kW) 0.75 to 6 kHz (HD mode: 500 and 630 kW, LD mode: 75 to 500 kW) 0.75 to 4 kHz (LD mode: 630 kW) 0.75 to 2 kHz (MD mode: 90 to 400 kW)	5 to 16 kHz
Starting torque			For details, please refer to the user's manual of FVR-Micro.	3-phase 200 VAC series: 200% or above, reference frequency 0.5 Hz (HHD FRN0069E□-2□ or below), 150% or above, ref. frequency 0.5 Hz (HND FRN0069E□-2□ or below), 3-phase 400 VAC series: 200% or above, ref. frequency 0.5 Hz (HHD FRN0072E□-4□ or below), 150% or above, ref. frequency 0.5 Hz (HND FRN0072E□-4□ or below), 120% or above, ref. frequency 0.5 Hz (HND/ND), 150% or above, ref. frequency 0.5 Hz (HD), Base frequency 50 Hz, with slip compensation and auto torque boost active	200% (22 kW or smaller) <sup>7</sup> 180% (30 kW or larger) <sup>7</sup>	200%
Brake	Standard torque (%) <sup>6</sup>		For details, please refer to the user's manual of FVR-Micro.	For details, please refer to the user's manual of FRENIC-Ace.	For details, please refer to the user's manual of FRENIC-MEGA.	80% (Average torque for 60 s braking with 50%ED)
	DC injection braking	Starting frequency	0.0 to 60.0 Hz	0.0 to 60.0 Hz	0.1 to 60.0 Hz	0.00 to 5.00 Hz (0.00 to 300.00 rpm)
		Braking time	0.0 to 30 s	0.0 to 30.0 s	0.0 to 30.0 s	0.00 to 30.00 s
		Braking level	0 to 100%	0 to 100%	0 to 100%	0 to 100%
Control method			0: V/f control with slip compensation inactive 1: Dynamic torque vector control 2: V/f control with slip compensation active	Induction motor drive: V/f control, vector control without speed sensor (Dynamic torque vector), V/f control, with slip compensation, V/f control, with slip sensor (PG option), V/f Control with speed sensor (+ Auto Torque Boost) (PG option), vector control with speed sensor (PG option) // Synchronous motors: Vector control without magnetic pole position sensor	V/f control, dynamic torque-vector control, V/f control, the slip compensation is available, V/f control w/ speed sensor (PG optional), dynamic torque vector control speed sensor (PG optional), speed sensorless vector control, vector control w/ speed sensor (PG optional)	Vector control with PG (Asynchronous Motor) Vector control with PG (Synchronous Motor) Dynamic torque vector control without PG (Asynchronous Motor) Vector control with Peripheral PG (Synchronous Motor) Sensor-less vector control for rescue operation (Synchronous Motor) (coming soon)
Acceleration/deceleration time			0.00 to 3600 s	0.00 to 6000 s	0.01 to 6000 s	0.00 to 99.9 s
Multistep frequency			16 steps	16 steps	16 steps	16 steps
Frequency setting control (analog input)			Term [C1] C1 function: 4 to 20 mA DC/ 0 to +100% / 0 to ±100%, 0 to 20 mA DC/ 0 to +100% / 0 to ±100% // Term [I2]: 0 to +10 (VDC)/0 to 100 (%) (Normal operation), +10 to 0 (VDC)/0 to 100 (%) (Inverse operation)	Term [I2]: 0 to ±10 VDC (±5 VDC)/ 0 to ±100% / 0 to +10 VDC (+5 VDC)/ 0 to +100% // Term [C1] C1 function: 4 to 20 mA DC/ 0 to +100% / 0 to ±100%, 0 to 20 mA DC/ 0 to +100% / 0 to ±100% // Term [I1] V2 function: 0 to +10 VDC (+5 VDC)/ 0 to +100% / 0 to ±100%, Inverse function available (20 to 4; 20 to 0)	0 to +10 V DC (inverse mode available) , 0 to +10 V DC (inverse mode available), 4 to +20 mA (inverse mode available)	0 to ±10 VDC (2 inputs) 4 to 20 mA DC
Standard functions			Setting max/min output frequency; momentary power off restarting; fault, restarting; acceleration/deceleration time; auto-voltage stabilizing output modulation; digital frequency output signal; fault records; parameters locking; reset to factory setting; over voltage stalling prevention, electronic thermal relay, traverse function, PID control, non-linear V/f pattern	Customizable logic, Droop control, Torque control, PID Control (with Dancer control), Torque limiter, Auto-tuning, Online tuning, 1st and 2nd motor settings, Zero speed control, Cooling fan ON/OFF control, Speed control, Positioning control with pulse counter, Master-follower operation, Pre-excitation, DC Braking, Mechanical brake control	Bias frequency, Gain for frequency setting, High and low frequency limiter, Jump frequency control, Slip compensation, Auto-restart after momentary power failure, Automatic deceleration, Torque limiting, Energy saving operation, Automatic torque boost, PID control, Link operation, Fan stop operation, Droop operation, Torque control	Forward rotation, reverse rotation and stop command, coast-to-stop command, alarm reset, forced stop, Multistep speed, analog signal for speed reference, multi-function keypad, communication, individual settings of each point of start, acceleration completion, deceleration beginning and stop, ASR feedforward compensation, ASR parameter change, Digital torque bias, Analog torque bias, Motor parameters tuning, Pole position tuning, Unbalanced load compensation, Creepless operation, Battery operation, digital output for short circuit for motor phases at stopping (PM motors), hidden parameters depending on control mode, Distance estimation for acceleration/deceleration, Rescue operation by motor brakes control, function for EN81-1 A3 UCM, Trip counter for EN81-1 A3, safety gear function, Output phase rotation, customizable logic interface, etc.
Protection			Overcurrent protection, short-circuit protection, ground fault protection, overvoltage protection, under voltage protection, input phase loss protection, output phase loss protection, overheat protection for inverter, overheat protection for braking resistor, overload protection, electronic thermal overload relay, PTC thermistor, overload early warning, stall prevention, external alarm input, alarm relay output (for any fault), memory error, CPU error, operation error, tuning error, RS-485 communication error, data save error during under voltage, retry function, surge protection, protection against momentary power failure, overload prevention control, mock alarm, PID feedback wire break detection	Overcurrent (short-circuit, ground fault), Overvoltage, Incoming surge, Undervoltage, Input phase loss, Overheating, Motor overload (Electronic thermal overload trip), Stall prevention, External alarm input, Memory error, Communication error. (KEYPAD, Option, RS-485), CPU error, Option error, Output phase loss error	Overcurrent (short-circuit, ground fault), Overvoltage, Incoming surge, Undervoltage, Input phase loss, Overheating, Motor overload (Electronic thermal overload trip), Stall prevention, External alarm input, Memory error, Communication error. (KEYPAD, Option, RS-485), CPU error, Option error, Output phase loss error	Overcurrent, short circuit, grounding fault, overvoltage, undervoltage, input phase loss, output phase loss, overheating, overload, external alarm, motor protection (electronic thermal and PTC), memory error, keypad communication error, CPU error, option communication error, option error, operation error, tuning error, RS485 communication error, data save error upon undervoltage, option hardware error, EN terminal circuit error, PG wiring broken, CAN bus communication error, overspeed prevention, speed mismatching, charging circuit fault, over torque current, etc.
Enclosure (IEC/EN60529)			IP20 (IEC 60529), UL open type (UL50)	IP20 closed type, UL open type (22 kW or smaller), IP00 open type, UL open type (30 kW or larger)	IP20 (IEC60529) closed type, UL open type (UL50) (22 kW or smaller), IP00 open type, UL open type (30kW or larger)	IP20 + IP54 Heat sink (From 2.2 to 15 kW) IP20 (from 18.5 to 22 kW), IP00 (from 30 to 45 kW)
Cooling method			Single-phase 200 V 0.4 to 2.2 kW fan cooling Three-phase 400 V 0.4 to 0.75 kW natural cooling Three-phase 400 V 1.5 to 3.7 kW fan cooling	Fan cooling	Natural cooling (1.5 kW or smaller) Fan cooling (2.2 kW or larger)	Fan cooling
Conformed standard			UL61800-5-1, IEC 61800-5-1	EC Directive (CE marking) <sup>3</sup> , UL standard (cUL certification) <sup>4</sup> , EAC <sup>5</sup> , STO <sup>6</sup>	EC Directive (CE marking) <sup>3</sup> , UL standard (cUL certification) <sup>4</sup> , EAC <sup>5</sup> , STO <sup>6</sup>	- EC Directive (CE marking) <sup>3</sup> - EAC <sup>5</sup> - Canada Safety Standard: CSA B44.1-11/ASME A17.5-2011 - Lift Directive (in extracts): EN 81-1 +A3 According to contactors less, brake monitoring (UCM) and travel direction counter - Low Voltage Directive: EN61800-5-1: Over voltage category 3 - EMC Directive: EN12015, EN12016, EN 61800-3 +A1, EN 61326-3 1, (Emission) Built-in EMC filter type : Category 2 (0025 (11kW) or lower), Category 3 (0032 (15kW) or higher), (Immunity) 2nd Env. - Machinery Directive EN ISO13849-1: PL-e / EN60204-1: stop category 0 EN61800-5-2: STO SIL3 / EN62061: SIL3

# SPECIFICATIONS

		FRENIC-VG (VG1 unit)	FRENIC-VG (VG1 stack / 400 V)	FRENIC-VG (VG1 stack / 690 V)	
Input ratings	Phase, Voltage, Frequency	3-phase 400 VAC	380 to 480 VAC, 50/60 Hz (3.7~55 kW) 380 to 440 VAC, 50 Hz (55~630 kW) 380 to 480 VAC, 60 Hz (55~630 kW)	380 to 440 VAC, 50 Hz 380 to 460 VAC, 60 Hz (For additional information refer to RHC-D and RHD-D specifications)	660 to 690 VAC, 50/60 Hz 575 to 600 VAC, 50/60 Hz (For additional information refer to RHC-D and RHD-D specifications)
		3-phase 200 VAC	200 to 230 VAC, 50/60 Hz (0.75~22 kW) 200 to 220 VAC, 50 Hz (30~90 kW) 200 to 230 VAC, 60 Hz (30~90 kW)	---	---
		1-phase	---	---	---
	Variations	Voltage: +10 to -15%, Frequency: -5 to +5% Voltage unbalance for 3-phase: 2% or less according to IEC61800-3	Voltage: +10 to -15%, Frequency: -5 to +5% Voltage unbalance for 3-phase: 2% or less according to IEC61800-3 (For additional information refer to RHC-D and RHD-D specifications)	Voltage: +10 to -15%, Frequency: -5 to +5% Voltage unbalance for 3-phase: 2% or less according to IEC61800-3 (For additional information refer to RHC-D and RHD-D specifications)	
Output overload capability		150% of rated current for 1 min (HD) (MD) 120% of rated current for 1 min (LD) 200% of rated current for 3 seconds (HD)	150% of rated current for 1 min (MD) 110% of rated current for 1 min (LD)	150% of rated current for 1 min (MD) 110% of rated current for 1 min (LD)	
Output frequency setting	Maximum frequency	500 Hz	150 Hz (Vector control with PG for IM, PMSM & V/f) 120 Hz (Vector control without PG for IM)	150 Hz (Vector control with PG for IM, PMSM & V/f) 120 Hz (Vector control without PG for IM)	
	Base frequency	500 Hz	150 Hz (Vector control with PG for IM, PMSM & V/f) 120 Hz (Vector control without PG for IM)	150 Hz (Vector control with PG for IM, PMSM & V/f) 120 Hz (Vector control without PG for IM)	
	Starting frequency	Vector control with PG (IM/PMSM): 0 Hz, Vector control without PG (IM): 1:250, V/f (IM): 0.2 Hz	Vector control with PG (IM/PMSM): 0 Hz Vector control without PG (IM): 1:250 V/f (IM): 0.2 Hz	Vector control with PG (IM/PMSM): 0 Hz Vector control without PG (IM): 1:250 V/f (IM): 0.2 Hz	
	Carrier frequency	2 to 15 kHz (0.75~55 kW in HD) 2 to 10 kHz (75~400 kW in HD) 2 to 5 kHz (500~630 kW in HD) 2 to 4 kHz (90~400 kW in MD) 2 to 10 kHz (30~55 kW in LD) 2 to 5 kHz (75~500 kW in LD) 2 kHz (630 kW in LD)	2 kHz	2 kHz	
Starting torque		200% (HD) 150% (MD), 120% (LD)	150% (MD) 110% (LD)	150% (MD) 110% (LD)	
Brake	Standard torque (%)		150%	Braking only available when RHC-D is used	Braking only available when RHC-D or BUC-D is used
	DC injection braking	Starting frequency	0.00 to 3600.00 rpm	0.00 to 3600.00 rpm	0.00 to 3600.00 rpm
		Braking time	0.00 to 30.00 s	0.00 to 30.00 s	0.00 to 30.00 s
		Braking level	0 to 100 %	0 to 100 %	0 to 100 %
Control method		- Vector control with PG (IM) - Vector control without PG (IM) - V/f (IM) - Vector control with PG (PMSM)	- Vector control with PG (IM) - Vector control without PG (IM) - V/f (IM) - Vector control with PG (PMSM)	- Vector control with PG (IM) - Vector control without PG (IM) - V/f (IM) - Vector control with PG (PMSM)	
Acceleration/deceleration time		0.00 to 99.9 s	0.00 to 99.9 s	0.00 to 99.9 s	
Multistep frequency		16 steps	16 steps	16 steps	
Frequency setting control (analog input)		0 to ±10 VDC 4 to 20 mA DC	0 to ±10 VDC 4 to 20 mA DC	0 to ±10 VDC 4 to 20 mA DC	
Standard functions		Start/stop operation, speed setting, speed detection, speed control, running status signals, acceleration/deceleration times, speed setting gains, jump speed, auto search for idling motor speed, auto-restart after momentary power failure, slip compensation, droop control, torque limit, torque control, PID control, cooling fan ON/OFF control, toggle monitor control, torque bias, motor selection, temperature detection, self-diagnostic function for PG detection circuit, load adaptive control, multiplex system (multiple winding motor drive and direct parallel connection), UP/DOWN control, stop function, PG pulse output, observer, offline tuning, online tuning, position control, pulse train, synchronous operation, STO, SSI, SBC, etc.	Start/stop operation, speed setting, speed detection, speed control, running status signals, acceleration/deceleration times, speed setting gains, jump speed, auto search for idling motor speed, auto-restart after momentary power failure, slip compensation, droop control, torque limit, torque control, PID control, cooling fan ON/OFF control, toggle monitor control, torque bias, motor selection, temperature detection, self-diagnostic function for PG detection circuit, load adaptive control, multiplex system (multiple winding motor drive and direct parallel connection), UP/DOWN control, stop function, PG pulse output, observer, offline tuning, online tuning, position control, pulse train, synchronous operation, STO, SSI, SBC, etc.	Start/stop operation, speed setting, speed detection, speed control, running status signals, acceleration/deceleration times, speed setting gains, jump speed, auto search for idling motor speed, auto-restart after momentary power failure, slip compensation, droop control, torque limit, torque control, PID control, cooling fan ON/OFF control, toggle monitor control, torque bias, motor selection, temperature detection, self-diagnostic function for PG detection circuit, load adaptive control, multiplex system (multiple winding motor drive and direct parallel connection), UP/DOWN control, stop function, PG pulse output, observer, offline tuning, online tuning, position control, pulse train, synchronous operation, STO, SSI, SBC, etc.	
Protection		Braking transistor broken, braking resistor overheated, DC fuse blown, excessive positioning deviation, PG communication error, safety circuit error, grounding fault, memory error, keypad communication error, CPU error, network error, RS485 communication error, operation error, output wiring fault, A/D converter error, speed not agreed, UPAC error, inter-inverter communications link error, hardware error, mock alarm, PG failure, input phase loss, start delay, undervoltage, NTC wire brake error, overcurrent, heat sink overheat, external alarm, inverter internal overheat, motor overheat, motor 1 overload, motor 2 overload, motor 3 overload, inverter overload, output phase loss, overspeed, overvoltage, PG wire brake, charger circuit fault, DC fan locked, E-SX bus tact synchronization error, toggle abnormality error, functional safety card error, light alarm (warning), surge protection, main power shut down	Braking transistor broken, braking resistor overheated, DC fuse blown, excessive positioning deviation, PG communication error, safety circuit error, grounding fault, memory error, keypad communication error, CPU error, network error, RS485 communication error, operation error, output wiring fault, A/D converter error, speed not agreed, UPAC error, inter-inverter communications link error, hardware error, mock alarm, PG failure, input phase loss, start delay, undervoltage, NTC wire brake error, overcurrent, heat sink overheat, external alarm, inverter internal overheat, motor overheat, motor 1 overload, motor 2 overload, motor 3 overload, inverter overload, output phase loss, overspeed, overvoltage, PG wire brake, charger circuit fault, DC fan locked, E-SX bus tact synchronization error, toggle abnormality error, functional safety card error, light alarm (warning), surge protection, main power shut down, etc.	Braking transistor broken, braking resistor overheated, DC fuse blown, excessive positioning deviation, PG communication error, safety circuit error, grounding fault, memory error, keypad communication error, CPU error, network error, RS485 communication error, operation error, output wiring fault, A/D converter error, speed not agreed, UPAC error, inter-inverter communications link error, hardware error, mock alarm, PG failure, input phase loss, start delay, undervoltage, NTC wire brake error, overcurrent, heat sink overheat, external alarm, inverter internal overheat, motor overheat, motor 1 overload, motor 2 overload, motor 3 overload, inverter overload, output phase loss, overspeed, overvoltage, PG wire brake, charger circuit fault, DC fan locked, E-SX bus tact synchronization error, toggle abnormality error, functional safety card error, light alarm (warning), surge protection, main power shut down, etc.	
Enclosure (IEC/EN60529)		IP20 (from 0.75 to 22 kW), IP00 (from 30 to 630 kW, IP20 available as an option)	IP00	IP00	
Cooling method		Fan cooling	Fan cooling	Fan cooling	
Conformed standard		EC Directive (CE marking) <sup>2</sup> UL standard (cUL certification) <sup>4</sup> EAC <sup>3</sup> Machinery Directive: IEC/EN ISO13849-1: PL-d, IEC/EN60204-1: Stop category 0 IEC/EN61800-5-2: SIL2, IEC/EN62061: SIL2	EC Directive (CE marking) <sup>2</sup> UL standard (cUL certification) <sup>4</sup> EAC <sup>3</sup> Machinery Directive: IEC/EN ISO13849-1: PL-d, IEC/EN60204-1: Stop category 0 IEC/EN61800-5-2: SIL2, IEC/EN62061: SIL2	Us and Canada Safety Standard* UL, cUL (UL508C, C22.2 No. 14) EAC <sup>3</sup> Machinery Directive* IEC/EN ISO13849-1: PL-d IEC/EN60204-1: Stop category 0 IEC/EN61800-5-2: SIL2 IEC/EN62061: SIL2 Low Voltage Directive* EN61800-5-1: Over voltage category 3 EMC Directive (with external EMC filter installed)* EN61800-3 *pending	

1 Non EMEA standard product.  
2 EMC Directive: EN61800-3 / Low Voltage Directive: EN61800-5-1  
3 GOST-R, GOST-K, GOST-B  
4 UL508C, C22.2 No 14

5 Functional Safety: EN61800-5-2: SIL2, ISO13849-1, SIL2, PL=d, cat. 3, Safe torque off, stop cat. 0  
6 Ratings applicable when no optional braking resistor is installed.  
7 With dynamic torque-vector control selected.



# FRENIC-Mini C2




With its rich functionality, compact design, simple operation, and global compatibility, the new FRENIC-Mini elevates the performance of a wide range of devices and equipment.

Including conveyors, fans, pumps, centrifugal separators, and food processing machines - we provide you the system integration, energy efficiency, reduced labour, and lower overall costs you're looking for.

- High performance and multipurpose
- Induction Motor control (V/f and Dynamic torque vector control), PMS Motor control (open loop)
- Slip compensation controller shortens setting time
- Fastest CPU processor in its class
- Optional USB keypad available
- Even easier to use and fully compatible with existing products: External dimensions of C1 model equal C2 model
- Energy use optimizer
- PID control function
- Cooling fan ON/OFF control function
- Network capabilities standard: RS-485 communications port
- Easier maintenance



## Dimensions

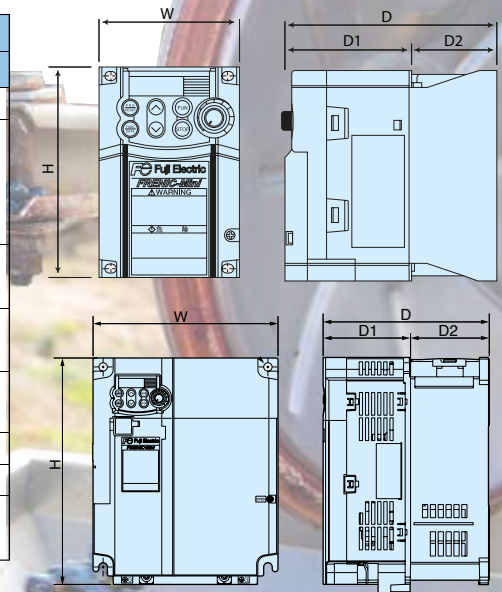

Power supply voltage	Applicable standard motor (kW)	Inverter model	Outside dimensions (mm)				
			W	H	D	D1	D2
3-phase 400 VAC w/ EMC filter built-in	0.4	FRN0002C2E-4□	110	130	158	118	40
	0.75	FRN0004C2E-4□					
	1.5	FRN0005C2E-4□	140	180	182	64	
	2.2	FRN0007C2E-4□					
3-phase 400 VAC w/o EMC filter built-in	5.5	FRN0013C2S-4□	180	230	158	70.3	87.7
	7.5	FRN0018C2S-4□					
	11	FRN0024C2S-4□	220	270	190	100	90
	15	FRN0030C2S-4□					
1-phase 200 VAC w/ EMC filter built-in	0.1	FRN0001C2E-7□	80	120	100	90	10
	0.2	FRN0002C2E-7□					
	0.4	FRN0004C2E-7□	110	130	115	99	40
	0.75	FRN0006C2E-7□					
	1.5	FRN0010C2E-7□	140	180	182	118	64
	2.2	FRN0012C2E-7□					

## TYPE CODE

Series name: FRENIC **FRN 0011 C2 E - 4 E**

Applicable rated current (this value shows an amperage rating)

Destination: E (Europe)

Input power supply:  
4: 3-phase 400 VAC / 7: 1-phase 200 VAC

Model:  
E: EMC filter built-in / S: Without EMC filter

Applied for: Mini, C2 series (successor of C1)



# FRENIC-AQUA AQ1



FRENIC-AQUA is Fuji Electric's first slim type inverter. It is dedicated to a variety of applications of water supply and wastewater treatment systems.

This new series follows European trends with keeping high Japanese reliability. Specific functions to prevent damage on the systems and new energy saving functions are installed as standard and positioning FRENIC-AQUA as a high performance inverter on the pumping application market.


- Wide capacity range from 0.75 kW to 710 kW
- IP21 & IP55 with same dimension
- DCR and EMC filter built-in up to 90 kW, built-in EMC filter for all capacities
- Overload capability 110%
- Torque Vector Control
- Battery (OPK-BP)
- Modbus RTU, BACnet MS/TP, Metasys N2; integrated as standard
- Large LCD display, 19 languages + user customizable language
- Specific macros for common pump applications
- Customizable Logic (mini PLC), 14 steps, possibility to manage digital and analog signals
- Real Time Clock (RTC)
- 4 PID Sets
- Unit conversion function (kPa, bar, l/min, etc.)
- Fire mode (forced operation)
- Password function
- New energy saving functions (sleep mode)
- Multipump control (up to 9 pumps with one inverter)
- Anti jam function
- Pipe fill mode
- Extension cable for remote operation (CB-...S)
- SIL2, P I d
- Sensorless PMSM control mode up to 90 kW (coming soon)



Power supply voltage	Applicable standard motor (kW)	Inverter model	Outside dimensions (mm)					
			W	H	D	D1	D2	
3-phase 400 VAC	0.75	FRN0.75AQ1□-4E	150	465	262	162	100	
	1.5	FRN1.5AQ1□-4E						
	2.2	FRN2.2AQ1□-4E						
	4.0	FRN4.0AQ1□-4E						
	5.5	FRN5.5AQ1□-4E						
	7.5	FRN7.5AQ1□-4E						
	11	FRN11AQ1□-4E	203	585	262	162	100	
	15	FRN15AQ1□-4E						
	18.5	FRN18.5AQ1□-4E						
	22	FRN22AQ1□-4E						
	30	FRN30AQ1□-4E	203	645	262	162	100	
	37	FRN37AQ1□-4E						
	45	FRN45AQ1□-4E	265	736	284	184	100	
	55	FRN55AQ1□-4E						
	75	FRN75AQ1□-4E						
	90	FRN90AQ1□-4E	300	885	368	241	127	
	110	FRN110AQ1S-4E	530	740	315	135	180	
	132	FRN132AQ1S-4E						
	160	FRN160AQ1S-4E		1000	360	180		180
	200	FRN200AQ1S-4E						
220	FRN220AQ1S-4E							
280	FRN280AQ1S-4E							
315	FRN315AQ1S-4E	680		1400	440	260		
355	FRN355AQ1S-4E							
400	FRN400AQ1S-4E							
500	FRN500AQ1S-4E	880		1550	500	313		187
630	FRN630AQ1S-4E	1000	1550	500	313	187		
710	FRN710AQ1S-4E							

Protective structure: M: IP21, L: IP55. Type of frame: up to 37 kW plastic enclosure, 45 kW and above metal enclosure.

## Dimensions

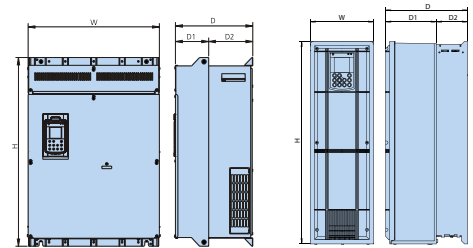

## Available as cabinet solution.

For more information, please see page 26.



## TYPE CODE

**FRN 0.75 AQ1 M - 4 E**  
 Series name: FRENIC  
 Standard applicable motor capacity (kW)  
 Applied for: AQUA  
 Destination: E (Europe)  
 Input power supply: 4: 3-phase 400 VAC  
 Protection Structure: S: IP00 M: IP21 L: IP55



# FRENIC-HVAC AR1



FRENIC-HVAC is Fuji Electric's first slim type inverter. It is dedicated to a variety of HVAC applications. This new series follows European trends with keeping high Japanese reliability.

Specific functions to manage fan and compressor applications and new energy saving functions are installed as standard and positioning FRENIC-HVAC as a high performance inverter on the HVAC and compressor market.




- Wide capacity range from 0.75 kW to 710 kW
- IP21 & IP55 with same dimension
- DCR and EMC filter built-in up to 90 kW, built-in EMC filter for all capacities
- Overload capability 110%
- Torque Vector Control
- Modbus RTU, BACnet MS/TP, Metasys N2; integrated as standard
- Large LCD display, 19 languages + user customizable language
- Specific macros for common fan and compressor applications
- Customizable Logic (mini PLC), 14 steps, possibility to manage digital and analog signals Real Time Clock (RTC)
- 4PID sets
- Unit conversion function (kPa, bar, l/min, etc.)
- Fire mode (forced operation) Catch spinning motor
- Password function
- Extension cable for remote operation (CB-...S)
- Battery (OPK-BP)
- SIL2, PI d
- Sensorless PMSM control mode up to 90 kW (coming soon)

Power supply voltage	Applicable standard motor (kW)	Inverter model	Outside dimensions (mm)					
			W	H	D	D1	D2	
3-phase 400V	0.75	FRN0.75AR1□-4E	150	465	262	162	100	
	1.5	FRN1.5AR1□-4E						
	2.2	FRN2.2AR1□-4E						
	4.0	FRN4.0AR1□-4E						
	5.5	FRN5.5AR1□-4E						
	7.5	FRN7.5AR1□-4E						
	11	FRN11AR1□-4E	203	585	262	162	100	
	15	FRN15AR1□-4E						
	18.5	FRN18.5AR1□-4E						
	22	FRN22AR1□-4E	203	645	262	162	100	
	30	FRN30AR1□-4E						
	37	FRN37AR1□-4E	265	736	284	184	100	
	45	FRN45AR1□-4E						
	55	FRN55AR1□-4E						
	75	FRN75AR1□-4E	300	885	368	241	127	
	90	FRN90AR1□-4E						
	3-phase 400V	110	FRN110AR1S-4E	530	740	315	135	180
		132	FRN132AR1S-4E					
		160	FRN160AR1S-4E					
		200	FRN200AR1S-4E					
220		FRN220AR1S-4E						
280		FRN280AR1S-4E	680	1000	360	180	180	
315		FRN315AR1S-4E						
355		FRN355AR1S-4E						
400		FRN400AR1S-4E	880	1400	440	260	180	
500		FRN500AR1S-4E						
630		FRN630AR1S-4E	1000	1550	500	313	187	
710	FRN710AR1S-4E							

□ Protective structure: M: IP21, L: IP55. Type of frame: up to 37 kW plastic enclosure, 45 kW and above metal enclosure.

### Dimensions

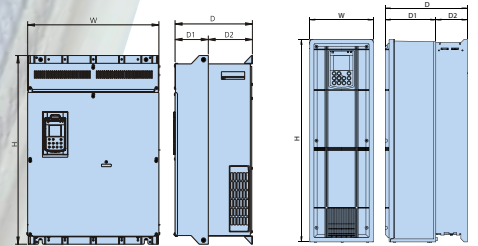


### Available as cabinet solution.

For more information, please see page 26.



## TYPE CODE

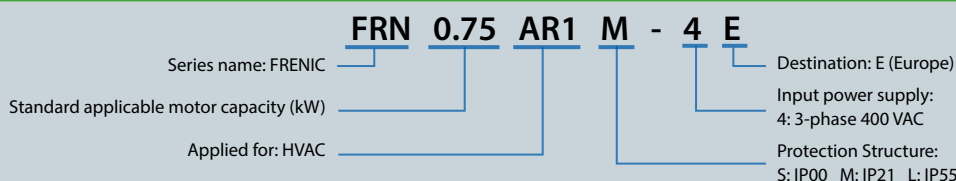



# FRENIC-Ace-H E2H NEW



FRENIC-Ace-H offers optimum capability in terms of energy saving for HVAC and water pumping applications. Its user friendliness, network compatibility, and long-term reliability are beneficial for long-run performance of systems.


Furthermore, with using customized logic, FRENIC-Ace-H enables to tailor its functionalities for specific requirements at each application.

- Quadruple Rating
- System Protection Functions
  - Slow flow rate
  - Check valve protection
  - Initial acceleration time
  - Over pressure
  - PID alarms
  - Wire break detection
- Water supply and drainage system function
  - Dynamic torque vector control
  - Cascade control (up to 4)
  - PID control (2 PID)
  - Mutual operation (up to 4)
  - Floating method
- Fire mode
- Starting mode (Auto search)
- Auto energy saving
- Customizable logic, Mini PLC (200 steps)
- Automatic deceleration
- Password function
- STO functional safety function as standard: STO SIL 3, Cat 3, PL e
- Built-in EMC filter: Built-in category C2/C3 EMC filter (All types are "E", except for 200V >30A: "S" type)
- PM synchronous motor drive: PM motor drive now possible with PM sensorless vector control
- Keypad built-in
- Multi-function keypad (option): Support for 19 languages + 1 customizable language



Power supply voltage	Applicable standard motor (kW)				Inverter model	Outside dimensions (mm)		
	HHD*	HND*	HD*	ND*		W	H	D
1-phase 200 VAC	0.1	-	-	-	FRN0001E2□-7□H	68	127	85
	0.2	-	-	-	FRN0002E2□-7□H			107
	0.4	-	-	-	FRN0003E2□-7□H			152
	0.75	-	-	-	FRN0005E2□-7□H	110	130	153
	1.5	-	-	-	FRN0008E2□-7□H			140
	2.2	-	-	-	FRN0011E2□-7□H			199
3-phase 400 VAC	0.4	0.75	0.75	0.75	FRN0002E2□-4□H	110	140	162
	0.75	1.1	1.1	1.5	FRN0004E2□-4□H			186
	1.5	2.2	2.2	2.2	FRN0006E2□-4□H	140	140	199
	2.2	3.0	3.0	3.0	FRN0007E2□-4□H			276
	3.7	5.5	5.5	5.5	FRN0012E2□-4□H			261
	5.5	7.5	7.5	11	FRN0022E2□-4□H	180	230	158
	7.5	11	11	15	FRN0029E2□-4□H			195
	11	15	15	18.5	FRN0037E2□-4□H	220	270	190
	15	18.5	18.5	22	FRN0044E2□-4□H			261
	18.5	22	22	30	FRN0059E2□-4□H	250	400	195
	22	30	30	37	FRN0072E2□-4□H			261
	30	37	37	45	FRN0085E2□-4□H	326.2	550	261
	37	45	45	55	FRN0105E2□-4□H			276
	45	55	55	75	FRN0139E2□-4□H	361.2	615	276
	55	75	75	90	FRN0168E2□-4□H			321
	75	90	90	110	FRN0203E2□-4□H	536.4	740	321
90	110	110	132	FRN0240E2□-4□H	366			
110	132	132	160	FRN0290E2□-4□H	686.4	1000	366	
132	160	160	200	FRN0361E2□-4□H			366	
160	200	200	220	FRN0415E2□-4□H	686.4	1000	366	
200	220	220	280	FRN0520E2□-4□H			366	
220	280	250	315	FRN0590E2□-4□H	686.4	1000	366	


### Dimensions

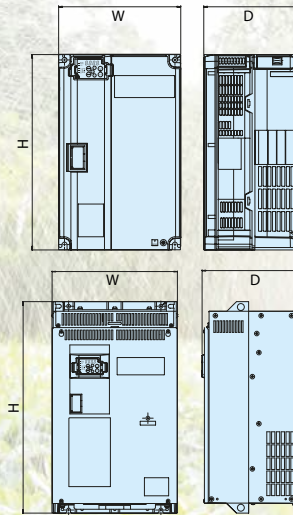

**Available as cabinet solution.**  
For more information, please see page 26.

\* HHD: 150% 1 min, 200% 0.5 s / HND: 120% 1 min / HD: 150% 1 min  
 Additional conditions:  
 - Temperature at 40°C for HD and ND, at 50°C for HHD and HND  
 - Carrier frequency: at 4 kHz for HD, ND (from 72 till 168), at 6 kHz for HHD (from 72 till 168), at 10 kHz for HD (from 72 till 168), at 4 kHz for ND, HND (from 203 till 590), at 6 kHz for HHD (from 203 till 590)  
 □ See type code explanations below.

## TYPE CODE

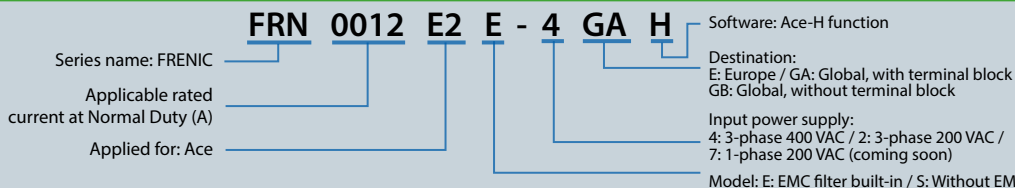

# FVR-Micro AS1S NEW



The new version of FVR-Micro (AS1S) combines two major characteristics: it's small and strong. The design is held especially simple, so the user benefits from an easy installation and smooth operations. Its conceptual design ensures saving space and energy, as well as costs. FRENIC-Micro

AS1S is a highly economic inverter for general purpose applications. It matches perfectly any application with limited space and where small capacities are needed, such as e.g. conveyor transports, mixer machines, or small wood-working machineries with basic functions.

- Capacity range from 0.4 to 3.7 kW
- 3-phase 400 V (0.4 to 3.7 kW)
- Single-phase 200 V (0.4 to 2.2 kW)
- Adoption of control system to minimize motor loss
- Equipped with RS-485 as standard
- PID control function
- Analog input / analog output / multi-stage frequency / jog operation / remote/local
- CE mark and UL/cUL approved standards



Power supply voltage	Applicable standard motor (kW)	Inverter model	Drawing	Outside dimensions (mm)		
				W	H	D
3-phase 400 VAC	0.4	FVR0.4AS1S-4E	B	108	128	139
	0.75	FVR0.75AS1S-4E				
	1.5	FVR1.5AS1S-4E				
	2.2	FVR2.2AS1S-4E				
	3.7	FVR3.7AS1S-4E				
1-phase 200 VAC	0.4	FVR0.4AS1S-7E	A	68	116	
	0.75	FVR0.75AS1S-7E	B	108		
	1.5	FVR1.5AS1S-7E				
	2.2	FVR2.2AS1S-7E				

## Dimensions



## TYPE CODE

**FVR 1.5 AS1 S - 4 E**

Series name: FRENIC/FVR — FVR  
 Standard applicable motor capacity (kW) — 1.5  
 Applied for: Micro, AS1S series — AS1  
 Destination: E (Europe) — E  
 Input power supply:  
 4: 3-phase 400 VAC — 4  
 7: 1-phase 200 VAC — 7  
 Protection Structure:  
 S: IP20 — S



# FRENIC-Ace E2



FRENIC-ACE is the inverter that produces excellent cost-performance with maintaining its high performance through optimal design. With 200 steps of customized logic as a standard feature, it enables users to customize their inverters from simple logistics function to full-scaled programming.

As a standard inverter for the next generation which can be applied to various machines and devices, FRENIC-Ace can be used in almost any type of application from fans and pumps up to specialized machines.

- Customizable logic (mini PLC, 200 steps), superior flexibility
- Quadruple rating
- CAN Open communications built-in as standard
- Wide variety of functions as a standard feature
- Safety enable input STO (compliant to EN/ISO13849-1, SIL3, PL=e, cat. 3)
- 10 years lifetime design
- Optional multifunctional keypad
- Closed loop for IM and Sensorless PMSM control modes




External dimensions with built-in filter except for 5.5 to 15 kW

Power supply voltage	Applicable standard motor (kW)				Inverter model	Outside dimensions (mm)		
	HHD*	HND*	HD*	ND*		W	H	D
1-phase 200 VAC	0.1	-	-	-	FRN0001E2□-7□	68	127	85
	0.2	-	-	-	FRN0002E2□-7□			107
	0.4	-	-	-	FRN0003E2□-7□			152
	0.75	-	-	-	FRN0005E2□-7□	110	130	153
	1.5	-	-	-	FRN0008E2□-7□			140
	2.2	-	-	-	FRN0011E2□-7□			140
3-phase 400 VAC	0.4	0.75	0.75	0.75	FRN0002E2□-4□	110	140	162
	0.75	1.1	1.1	1.5	FRN0004E2□-4□			186
	1.5	2.2	2.2	2.2	FRN0006E2□-4□			140
	2.2	3.0	3.0	3.0	FRN0007E2□-4□			
	3.7	5.5	5.5	5.5	FRN0012E2□-4□			
	5.5	7.5	7.5	11	FRN0022E2□-4□	180	230	158
	7.5	11	11	15	FRN0029E2□-4□			
	11	15	15	18.5	FRN0037E2□-4□			
	15	18.5	18.5	22	FRN0044E2□-4□	220	270	190
	18.5	22	22	30	FRN0059E2□-4□			
	22	30	30	37	FRN0072E2□-4□			
	30	37	37	45	FRN0085E2□-4□	326.2	550	261
	37	45	45	55	FRN0105E2□-4□			
	45	55	55	75	FRN0139E2□-4□			
	55	75	75	90	FRN0168E2□-4□	361.2	615	276
	75	90	90	110	FRN0203E2□-4□			675
90	110	110	132	FRN0240E2□-4□	740			
110	132	132	160	FRN0290E2□-4□	536.4	740	321	
132	160	160	200	FRN0361E2□-4□				
160	200	200	220	FRN0415E2□-4□				
200	220	220	280	FRN0520E2□-4□	686.4	1000	366	
220	280	250	315	FRN0590E2□-4□				

Note: 3-phase 200 VAC available in a different type code.

Dimensions

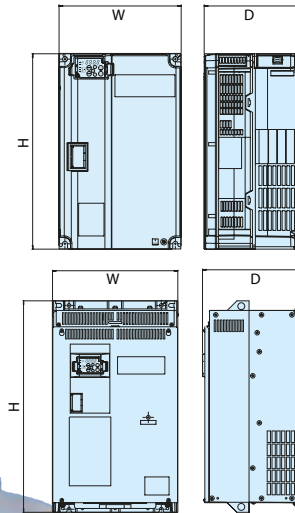

Available as cabinet solution. For more information, please see page 26.

## TYPE CODE

Series name: FRENIC **FRN 0059 E2 S - 4 E**  
 Applicable rated current at Normal Duty  
 Applied for: Ace

Destination:  
 E: Europe / GA: Global, with terminal block  
 GB: Global, without terminal block  
 Input power supply:  
 4: 3-phase 400 VAC /  
 2: 3-phase 200 VAC /  
 7: 1-phase 200 VAC (coming soon)  
 Model: E: EMC filter built-in / S: Without EMC filter





# FRENIC-Ace for Solar Pumping



With FRENIC-Ace for Solar Pumping, we offer our contribution for renewable energy control. Water pumping via solar photovoltaic systems uses energy from photovoltaic (PV) panels to power an electrical water pump. FRENIC-Ace controls and handles easily all system relevant functions and acts as the interface between the PV panel and the motor pump.

Submersible pumps are mainly used for ground water extraction in the field of irrigation, potable water extraction or livestock watering, which are the target applications. Our optional intelligent monitoring system (IoT) helps to monitor and control the water consumption.




- True and outstanding MPPT function (Maximum Power Point Tracking)
- Start criteria by system conditions and time
- Stop criteria selectable
- Dry pump detection function
- Low power function
- Water tank level control
- It allows to control asynchronous motors and permanent magnets synchronous motors
- Detection of sudden changes of conditions (especially irradiance)
- Two sets of PID gains, for a fast and smooth operation
- Grid connection selectable for maintenance and backup system

Motor (kW)	Motor Voltage [3ph 400 VAC] AC Power Supply [3ph 400 VAC] <sup>1,3</sup> DC Voltage Supply [400 to 800 VDC]		Motor Voltage [3ph 200 VAC] AC Power Supply [3ph 200 VAC] <sup>1,3</sup> DC Voltage Supply [180 to 360 VDC]		Motor Voltage [3ph 200 VAC] AC Power Supply [1ph 200 VAC] <sup>1,3</sup> DC Voltage Supply [180 to 360 VDC]		Dimensions (mm)			
	HND*1	Model	[A]*2	Model	[A]*2	Model	[A]*2	W	H	D
0.1								68	127	112
0.2								68	127	112
0.4								68	127	112/127
0.75	FRN0002E2E-4GA-CLI-SOL	1.8	FRN0004E2E-2GA-CLI-SOL	3.5	FRN0005E2E-7GA-CLI-SOL	5		110/68/110	130/127/130	162/127/129
1.1	FRN0004E2E-4GA-CLI-SOL	3.4	FRN0006E2E-2GA-CLI-SOL	6	FRN0008E2E-7GA-CLI-SOL	8		110/68/140	130/127/130	186/152/199
1.5	FRN0006E2E-4GA-CLI-SOL	5	FRN0010E2E-2GA-CLI-SOL	9.6	FRN0008E2E-7GA-CLI-SOL	8		140	130	199
2.2	FRN0006E2E-4GA-CLI-SOL	5	FRN0010E2E-2GA-CLI-SOL	9.6	FRN0011E2E-7GA-CLI-SOL	11		140	130	199
3.0	FRN0007E2E-4GA-CLI-SOL	6.3	FRN0012E2E-2GA-CLI-SOL	12				140	130	199
4	FRN0012E2E-4GA-CLI-SOL	11.1	FRN0020E2E-2GA-CLI-SOL	19.6				140	130	199
5.5	FRN0012E2E-4GA-CLI-SOL	11.1	FRN0020E2E-2GA-CLI-SOL	19.6				140	130	199
7.5	FRN0022E2E-4E-CLI-SOL	17.5	FRN0030E2S-2GB-CLI-SOL	30				181.5/180	285/220	208/158
11	FRN0029E2E-4E-CLI-SOL	23	FRN0040E2S-2GB-CLI-SOL	40				181.5/180	285/220	208/158
15	FRN0037E2E-4E-CLI-SOL	31	FRN0056E2S-2GB-CLI-SOL	56				220/220	332/260	245/190
18.5	FRN0044E2E-4E-CLI-SOL	38	FRN0069E2S-2GB-CLI-SOL	69				220/220	332/260	245/190
22	FRN0059E2E-4E-CLI-SOL	45	FRN0088E2S-2GB-CLI-SOL	88				250	400	195
30	FRN0072E2E-4E-CLI-SOL	60	FRN0115E2S-2GB-CLI-SOL	115				250/250	400/400	195/195
37	FRN0085E2E-4E-CLI-SOL	75						326.2	550	261
45	FRN0105E2E-4E-CLI-SOL	91						326.2	550	261
55	FRN0139E2E-4E-CLI-SOL	112						361.2	615	276
75	FRN0168E2E-4E-CLI-SOL	150						361.2	675	276
90	FRN0203E2E-4E-CLI-SOL	176						361.2	740	276
110	FRN0240E2E-4E-CLI-SOL	210						536.4	740	321
132	FRN0290E2E-4E-CLI-SOL	253						536.4	740	321
160	FRN0361E2E-4E-CLI-SOL	304						536.4	1000	366
200	FRN0415E2E-4E-CLI-SOL	377						536.4	1000	366
220	FRN0520E2E-4E-CLI-SOL	415						686.4	1000	366
280	FRN0590E2E-4E-CLI-SOL	520						686.4	1000	366

1: HND Overload capability, 120% for 1min at 50°C  
2: [A] = Current  
3: Grid connection selectable for maintenance and backup system

## Dimensions

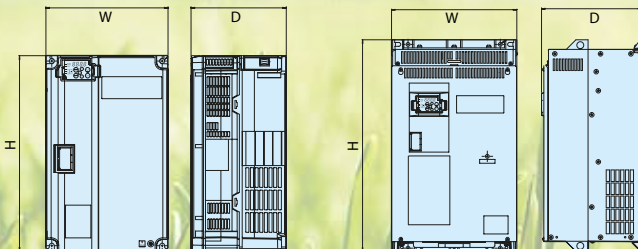

Available as cabinet solution. For more information, please see page 26.

## TYPE CODE

FRN 0059 E2 E - 4 E - CLI - SOL

Series name: FRENIC  
Applicable rated current at Normal Duty  
Applied for: Ace  
Model: E: EMC filter built-in / S: Without EMC filter

Especially equipped for solar pumping applications

Destination:  
E: Europe / GA: Global, with terminal block  
GB: Global, without terminal block

Input power supply (AC connection):  
4: 3-phase 400 VAC  
2: 3-phase 200 VAC  
7: 1-phase 200 VAC





# FRENIC-MEGA G1

FRENIC-MEGA, which is the successor of former G11S series and named as a "Maximum Engineering for Global Advantage", is a high performance, multifunctional inverter, gathering the best of Fuji Electric's technologies.

With the flexibility and functionality to support a wide range of applications on all types of mechanical equipment, FRENIC-MEGA combines core capability, responsiveness, environmental awareness, and easy maintenance.


- Safety enable input (compliant to EN/ISO13849- PL=d, cat. 3)
- Built-in EMC filter for all capacities (compliant to EN 61800-3, category C3)
- Sensorless vector control mode (100% torque at 0 Hz)
- Advanced PID functions (dancer control)
- Brake control function
- Logic gates for logic combination of input and output functions and delay timer (10 steps)
- 3 slots for 3 different options at the same time (encoder, fieldbus, I/O expansion)
- Removable control terminals (cage clamp type)
- External EMC filter (footprint up to 22 kW) for higher EMC compliance (EN 61800-3, category C2)
- Basic LED keypad with built-in USB port and copy function (1 complete function set, operation, maintenance and alarms information)
- Advanced LCD/LED keypad with clear text description and copy function (3 complete function sets)
- Positioning function (when encoder option is used)



Protection Structure: E: EMC Filter built-in / S: Standard basic type  
\*HD: 150% for 1 min, 200% for 3.0 s / LD: 120% for 1 min


Power supply voltage	Applicable standard motor (kW)		Inverter model	Outside dimensions (mm)		
	HD *	LD *		W	H	D
3-phase 400 VAC	0.4	-	FRN0.4G1□-4E	110	260	130
	0.75	-	FRN0.75G1□-4E			
	1.5	-	FRN1.5G1□-4E			
	2.2	-	FRN2.2G1□-4E	150	260	145
	4.0	-	FRN4.0G1□-4E			
	5.5	7.5	FRN5.5G1□-4E	220	400	195
	7.5	11	FRN7.5G1□-4E			
	11	15	FRN11G1□-4E			
	15	18.5	FRN15G1□-4E	250	400	195
	18.5	22	FRN18.5G1□-4E			
	22	30	FRN22G1□-4E			
	30	37	FRN30G1□-4E	326.2	550	261.3
	37	45	FRN37G1□-4E			
	45	55	FRN45G1□-4E			
	55	75	FRN55G1□-4E	361.2	675	276.3
	75	90	FRN75G1□-4E			
	90	110	FRN90G1□-4E			
	110	132	FRN110G1□-4E	535.8	740	321.3
	132	160	FRN132G1□-4E	536.4	1000	366.3
	160	200	FRN160G1□-4E			
200	220	FRN200G1□-4E				
220	280	FRN220G1□-4E	686.4	1400	445.5	
280	315	FRN280G1□-4E				
315	355	FRN315G1□-4E				
355	400	FRN355G1□-4E	886.4	1550	505.9	
400	500	FRN400G1□-4E				
500	630	FRN500G1□-4E				
630	710	FRN630G1□-4E	1006	1550	505.9	

### Dimensions

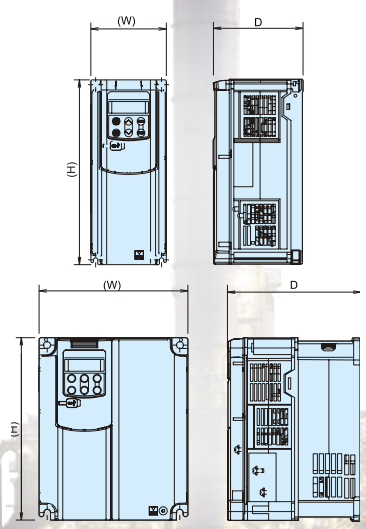

**Available as cabinet solution.**  
For more information, please see page 26.

## TYPE CODE

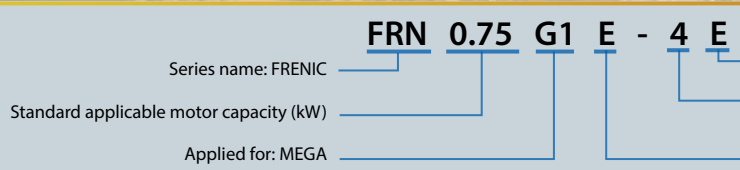

Destination: E (Europe)  
Input power supply:  
4: 3-phase 400 VAC / 2: 3-phase 200 VAC  
Model:  
E: EMC filter built-in / S: Without EMC filter



# FRENIC-Lift LM2A



In 2005, Fuji Electric designed the first FRENIC-Lift inverter to fulfill the requirements of lift applications. FRENIC-Lift is nowadays the most preferred inverter for lift application in the market.


By using the experiences in market, we have now developed the upgraded version of FRENIC-Lift, the LM2A: smaller but smarter.

- Book type frame up to 15 kW Dual Mounting (book type)
- Feed through mounting with IP54 heat sink (book type)
- Removable input and output power terminals (book type)
- Contactorless solution compliant to EN81-20
- Different energy saving levels according to Draft ISO 25745 & VDI 4707
- Easier rescue operation with 24 VDC power supply for control board
- Built-in EMC filter
- Built-in advanced fieldbuses dedicated to lift applications (CANopen CiA DSP 402 & 417, DCP 3 & 4)
- Faster speed and current control loop for easier and faster comfort adjustment
- Removable control terminals
- Two new motor control modes: Vector control with peripheral PG and sensorless vector control for rescue operation (PMSM)
- Several certified functions for safety operation
- New software functions for an easier setup
- Customizable logic capability (PLC function)



Power Supply Voltage	Type	Applied motor current	Applied motor capacity	Outside Dimensions (mm)			
				W	H	D	
3-phase 400 VAC	FRN0006LM2A-4E	6.1 A	2.2 kW	140	260	195	
	FRN0010LM2A-4E	10 A	4.0 kW				
	FRN0015LM2A-4E	15 A	5.5 kW				
	FRN0019LM2A-4E	18.5 A	7.5 kW				
	FRN0025LM2A-4E	24.5 A	11 kW	160	360	195	
	FRN0032LM2A-4E	32 A	15 kW				
	FRN0039LM2A-4E	39 A	18.5 kW	250	400	195	
	FRN0045LM2A-4E	45 A	22 kW				
	FRN0060LM2A-4E	60 A	30 kW				
	1-phase 200 VAC	FRN0075LM2A-4E	75 A	37 kW	326.2	550	261.3
		FRN0091LM2A-4E	91 A	45 kW			
FRN0011LM2A-7E		11 A	2.2 kW	140	260	195	
FRN0018LM2A-7E		18 A	4.0 kW				

**Available as wall mounted version.**  
For more information, please contact your sales representative.

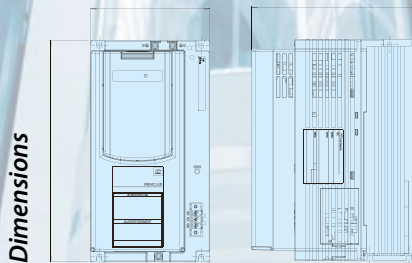

## TYPE CODE

Series name: FRENIC **FRN**  
 Applicable rated current **0025**  
 Applied for: Lift **LM2A**  
 Destination: E: Europe **- 4**  
 Input power supply: 4: 3-phase 400 VAC 7: 1-phase 200 VAC **E**





# FRENIC-VG VG1 unit type



With FRENIC-VG, Fuji Electric has concentrated its technologies to deliver the best-performing inverter on the market. In addition to its basic performance, this model features the following great improvements: support for previously difficult applications due to technical and capability

limitations, easier and more user-friendly maintenance, as well as environmental friendliness and safety. With using its vector control, FRENIC-VG unit type will cover various applications which require powerful but also accurate performance.


- Powerful: from 0.75 kW to 630 kW in triple rating HD, LD and MD
- Strong: even in hard environments such as sulfurizing gas, salty environments, dust, humidity, etc.
- Flexible: IM (open and closed loop) and PMSM (open\* and closed loop) control \*coming soon
- Torque accuracy: +/- 3%
- Current loop bandwidth: 2000 Hz
- Speed control accuracy: +/- 0,005%
- Speed loop bandwidth: 600Hz
- Connected to the world: USB on board, typical field buses and Ethernet based field bus
- Making safety easier: STO, SS1, SLS, SBC
- All applications solved: Cranes, rubber, paper, winding, test benches, press, shipboard winch, flying shear, positioning, etc are included
- Adaptable and versatile: 5 slots for adjusting to the requirements, real time built in, FULL PLC on board optional, etc.




Power supply voltage	Applicable standard motor (kW)			Inverter model	Outside dimensions (mm)		
	HD*	MD*	LD*		W	H	D
3-phase 400 VAC	3.7	-	-	FRN3.7VG1S-4E	205	300	245
	5.5	-	-	FRN5.5VG1S-4E			
	7.5	-	-	FRN7.5VG1S-4E			
	11	-	-	FRN11VG1S-4E	250	400	245
	15	-	-	FRN15VG1S-4E			
	18.5	-	-	FRN18.5VG1S-4E			
	22	-	-	FRN22VG1S-4E	326.2	550	261.3
	30	-	37	FRN30VG1S-4E			
	37	-	45	FRN37VG1S-4E			
	45	-	55	FRN45VG1S-4E	361.2	675	276.3
	55	-	75	FRN55VG1S-4E			
	75	-	90	FRN75VG1S-4E			
	90	110	110	FRN90VG1S-4E	536.4	740	321.3
	110	132	132	FRN110VG1S-4E			
	132	160	160	FRN132VG1S-4E			
	160	200	200	FRN160VG1S-4E	686.4	1000	366.3
	200	220	220	FRN200VG1S-4E			
	220	-	280	FRN220VG1S-4E			
	280	315	355	FRN280VG1S-4E	886.4	1400	445.5
	315	355	400	FRN315VG1S-4E			
355	400	450	FRN355VG1S-4E				
400	450	500	FRN400VG1S-4E	1006	1550	505.9	
500	-	630	FRN500VG1S-4E				
630	-	710	FRN630VG1S-4E				

\*200 VAC series: HD: 150% 1 min, 200% 3 s / LD: 120% 1 min  
400 VAC series: HD: 150% 1 min, 200% 3 s / MD: 150% 1 min / LD: 120% 1 min

## Dimensions

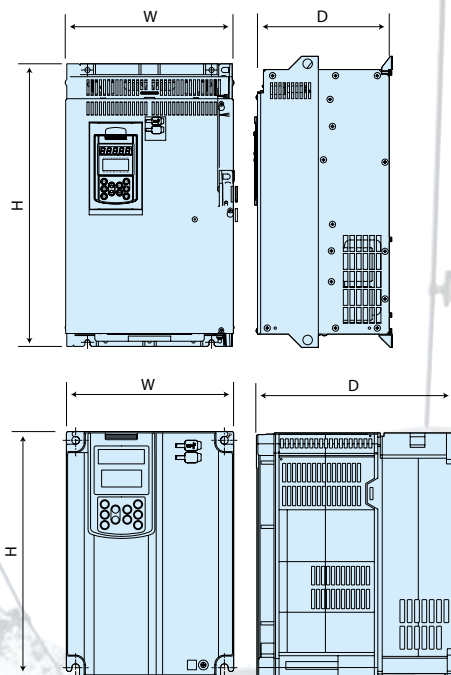

## TYPE CODE

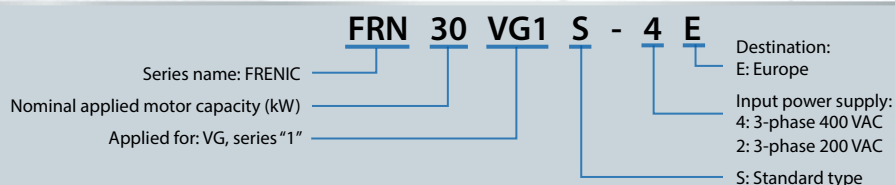



# FRENIC-VG VG1 stack type



With FRENIC-VG, Fuji Electric has concentrated its technologies to deliver the best performing inverter on the market. In addition to its basic performance, this model features the following great improvements: support for previously difficult applications due to

technical and capability limitations, easier and more user-friendly maintenance, as well as environmental friendliness and safety. With using its parallel installation, FRENIC-VG stack type will cover various applications which require forceful performance.

- Powerful: 30 kW to 3 MW in dual rating (MD/LD)
- Regenerative (converter) and non-regenerative (rectifier) headers from 132 kW to 3 MW
- Flexible: IM (open and closed loop) and PMSM (closed loop) control
- Easy to install
- Harmonic distortion mitigation: Sinusoidal-wave Regenerative Header, 12 pulses layout, etc.
- DC bus link sharing: multiple possibilities of power layout
- Redundancy: possible to work at half power in case of maintenance or stack failure
- Non-stop function and other possibilities
- Making safety easier: STO, SSt, SLS, SBC
- 690 VAC series available
- Marine approval DNV-GL


Power supply voltage	No. of units	Applicable standard motor (kW)		Inverter model	Outside dimensions (mm)				
		MD*	LD*		W	H	D		
3-phase 400 VAC	1	30	37	FRN30SVG1S-4E	226.2	740	406.3		
		37	45	FRN37SVG1S-4E					
		45	55	FRN45SVG1S-4E		880			
		55	75	FRN55SVG1S-4E					
		75	90	FRN75SVG1S-4E					
		90	110	FRN90SVG1S-4E					
	1	110	132	FRN110SVG1S-4E	226.2	1100	567.3		
		132	160	FRN132SVG1S-4E					
		160	200	FRN160SVG1S-4E					
		200	220	FRN200SVG1S-4E					
		220	250	FRN220SVG1S-4E					
		250	280	FRN250SVG1S-4E					
		1	280	315		FRN280SVG1S-4E		698.6	1400
			315	355		FRN315SVG1S-4E			
			630	710		FRN630BVG1S-4E **			
			710	800		FRN710BVG1S-4E **			
			800	1000		FRN800BVG1S-4E **			
			355	400		FRN200SVG1S-4E			
	400	-	FRN220SVG1S-4E						
	-	500	FRN250SVG1S-4E						
	500	630	FRN280SVG1S-4E						
	1000	1200	FRN630BVG1S-4E **						
	1200	1200	FRN630BVG1S-4E **						
	2	-	1500	FRN710BVG1S-4E **	1367.2	1400			
		1500	1800	FRN800BVG1S-4E **					
		630	-	FRN220SVG1S-4E					
		-	710	FRN250SVG1S-4E					
		-	800	FRN250SVG1S-4E					
710		-	FRN280SVG1S-4E						
3	800	-	FRN280SVG1S-4E	698.6	1400				
	-	1000	FRN315SVG1S-4E						
	1800	2000	FRN630BVG1S-4E **						
	2000	2400	FRN710BVG1S-4E **						
	2400	1800	FRN800BVG1S-4E **						
	90	110	FRN90SVG1S-69E			226.2	880	567.3	
110	132	FRN110SVG1S-69E							
132	160	FRN132SVG1S-69E	1100						
160	200	FRN160SVG1S-69E							
200	220	FRN200SVG1S-69E							
250	280	FRN250SVG1S-69E							
280	315	FRN280SVG1S-69E							
315	355	FRN315SVG1S-69E							
355	400	FRN355SVG1S-69E***	1400						
400	450	FRN400SVG1S-69E***							
450	-	FRN450SVG1S-69E***							
450	-	FRN450SVG1S-69E***							

\* MD: 150% 1 min / LD: 110% 1 min  
 \*\* One set of the inverter consists of three stacks.  
 The touch panel is connected to the V phase only.  
 \*\*\* Equipped with SIC hybrid module


**NEW**



**Available as cabinet solution.**  
 For more information, please see page 26.

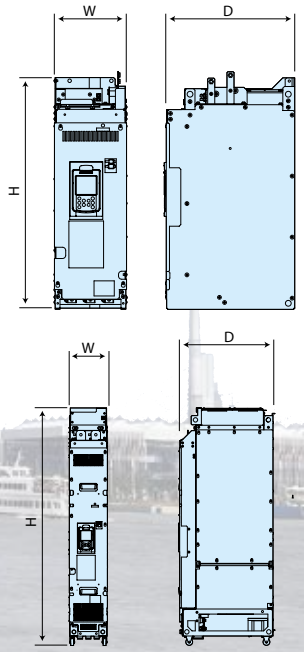

## TYPE CODE

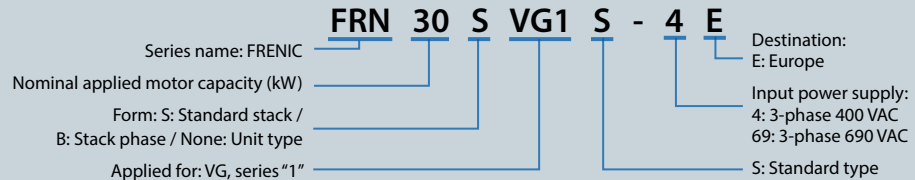



# PWM Converter

## RHF-D SERIES



RHF series is the compact solution and dedicated filter for the PWM converter (RHC-D) in the shape of stack type. Charging circuit, harmonic filter and boosting reaction all in one.

### RHF-D table

Series	Filter stack type	Fig.	External dimensions [mm]		
			W	H	D
400 V Series	RHF160S-4D □	A	226.2	1166	565
	RHF220S-4D □	A			
	RHF280S-4D □	B	226.2	1400	565
	RHF355S-4D □	B			
690 V Series	RHF160S-69D □	A	226.2	1166	565
	RHF220S-69D □	B	226.2	1400	565
	RHF280S-69D □	B			
	RHF355S-69D □	B			
	RHF450S-69D □	C	336.2	1400	565


- The RHF-D series is a dedicated filter stack for the high power factor PWM converter with power regenerative function (RHC-D Series).

- This device is used in combination with the RHC-D Series, and peripheral devices (filtering circuit, boosting circuit, charging circuit) required by the PWM converter have been combined into a single unit.

- Peripheral device wire reduction and attachment space saving is possible.

- A stack type with same shape as the inverter (stack type) and PWM converter (RHC-D) has been adopted. This has been effective in making panels more compact.

- 690 VAC Marine Approval: DNV-GL type approval certificate available for -69 series

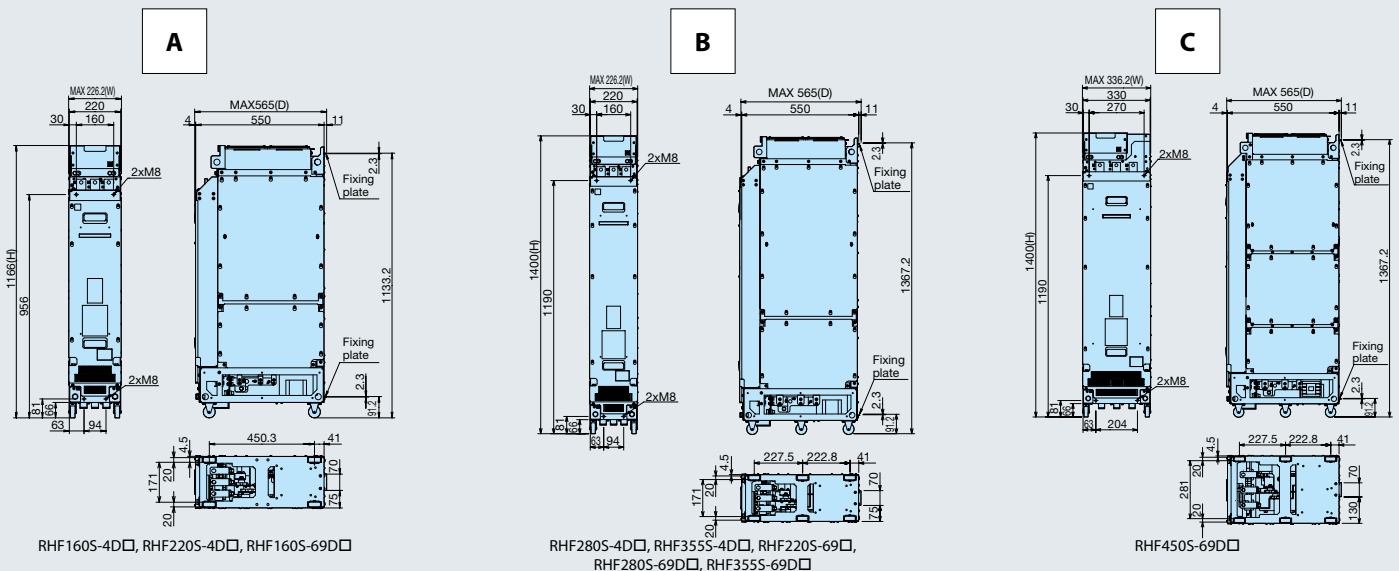

### TYPE CODE

Series name: **RHF 355 S - 4 D E**

RHC: PWM CONVERTER / RHD: Diode Rectifier  
 RHF: Filter for PWM Converter

Nominal applied motor capacity (kW)

Form: None: Unit type / S: Standard stack / B: Stack by phase

Destination (only with the D series): E: Europe

Developed inverter series: C: C Series / D: D Series

Input power supply: 4: 3-phase 400 VAC / 69: 3-phase 690 VAC





# PWM Converter

## RHC-D SERIES




RHC-D series is the active front-end of Fuji Electric in stack type configuration.

### RHC-D table

Series	PWM converter Type	Fig.	Dimensions [mm]		
			W	H	D
400 V series	RHC132S-4D □	A	226.2	1100	565
	RHC160S-4D □	A			
	RHC200S-4D □	A	226.2	1400	565
	RHC220S-4D □	B			
	RHC280S-4D □	B			
	RHC315S-4D □	B			
	RHC630B-4D □*	C			
	RHC710B-4D □*	C			
RHC800B-4D □*	C				
690 V series	RHC132S-69D □	A	226.2	1100	565
	RHC160S-69D □	A			
	RHC200S-69D □	A	226.2	1400	565
	RHC250S-69D □	B			
	RHC280S-69D □	B			
	RHC315S-69D □	B			
	RHC355S-69D □	B			
	RHC400S-69D □	B			
	RHC450S-69D □	B			

- Rating available in MD and LD
- Capacity range from 132 kW to 6 MW
- Two configurations available:
  - Standard stack
  - Phase stack
- Able to work with isolated and non-isolated transformers
- Input voltage: 400 VAC or 690 VAC
- Each RHC-D type has its associated RHF
- RHF dimensions are equivalent to RHC-D dimensions
- 690 VAC Marine Approval: DNV-GL type approval certificate available for -69 series

\* Each stack corresponds to one phase, and one set of the inverter consists of three stacks. The keypad is only attached to the S phase.

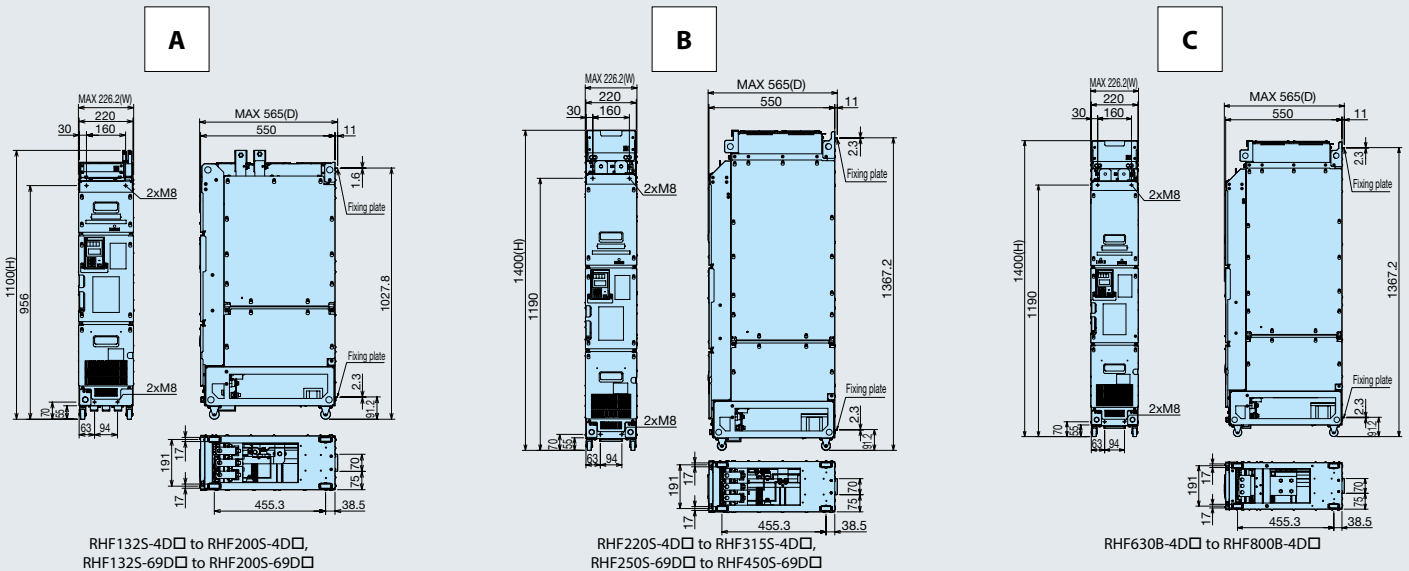

### TYPE CODE

Series name:  
 RHC: PWM CONVERTER / RHD: Diode Rectifier  
 RHF: Filter for PWM Converter  
 Nominal applied motor capacity (kW)  
 Form: None: Unit type /  
 S: Standard stack / B: Stack by phase



Destination (only with the D series):  
 E: Europe  
 Developed inverter series:  
 C: C Series / D: D Series  
 Input power supply:  
 4: 3-phase 400 VAC / 69: 3-phase 690 VAC





# HMI (Human Machine Interface)

## MONITOUCH V9



### The biggest revolution on the Graphical User Interfaces

A new concept, a new philosophy, by which every system integrator can heavily access to the latest **VPN and IIoT technologies** offered by the global networking without any specific knowledge.

**V9**, known as the **Web Machine Interface**, is the new generation of MONITOUCH series which offers compatibility with mobile equipment, advanced use of information through networking, high-speed free-style drawing and optimum operability.

ADVANCED

Model	Display Size	Resolution	Specifications							Sound Output
			Touch Switch	Ethernet (LAN) Ports	Wireless LAN	Serial Ports	SD Card	USB type A & Mini B	VPN	
V9101iWRLD	10.1" Wide	1024 x 600	Capacitive	2	Yes	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9100iWRLD			Resistive	2	Yes	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9101iWLD			Capacitive	2	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9100iWLD			Resistive	2	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9071iWRLD	7" Wide	800 x 480	Capacitive	2	Yes	3 <sup>2</sup>	Yes	Yes	Yes <sup>1</sup>	-
V9070iWRLD			Resistive	2	Yes	3 <sup>2</sup>	Yes	Yes	Yes <sup>1</sup>	-
V9071iWLD			Capacitive	2	-	3 <sup>2</sup>	Yes	Yes	Yes <sup>1</sup>	-
V9070iWLD			Resistive	2	-	3 <sup>2</sup>	Yes	Yes	Yes <sup>1</sup>	-

STANDARD

V9150iXD	15"	1024 x 768	Restistive	1	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9150iXLD				2	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9120iSD	12.1"	800 x 600	Restistive	1	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9120iSBD				1	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9120iSLD				2	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9120iSLBD				2	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9100iSD	10.4"	800 x 600	Restistive	1	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9100iSBD				1	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9100iSLD				2	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9100iSLBD				2	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9080iSD	8.4"	800 x 600	Restistive	1	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9080iSBD				1	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9080iSLD				2	-	3	Yes	Yes	Yes <sup>1</sup>	Yes
V9080iSLBD				2	-	3	Yes	Yes	Yes <sup>1</sup>	Yes

LITE

V9100iCD	10.4"	640 x 480	Restistive	1	-	3	Yes	Yes	Yes <sup>1</sup>	-
V9100iCBD				1	-	3	Yes	Yes	Yes <sup>1</sup>	-
V9080iCD	8.4"	640 x 480	Restistive	1	-	3	Yes	Yes	Yes <sup>1</sup>	-
V9080iCBD				1	-	3	Yes	Yes	Yes <sup>1</sup>	-
V9060iTD	5.7"	640 x 480	Restistive	1	-	3 <sup>2</sup>	Yes	Yes	Yes <sup>1</sup>	-
V9060iTBD				1	-	3 <sup>2</sup>	Yes	Yes	Yes <sup>1</sup>	-

1: VPN (built-in router, licence needed)  
2: When optional unit DUR-00 is installed

### TYPE CODE

V9□□□ i □□□□□□□□

Display size  
15: 15.0"  
12: 12.1"  
10: 10.4" (Standard)/  
10.1" widescreen  
(Advanced)  
08: 8.4"  
07: 7.0" widescreen (Advanced)  
06: 5.7"

Touch switch  
0: Resistive  
1: Capacitive

Interface  
i: With a built-in LAN port

Display device  
W: TFT color LCD (10.1" wide type=WSVGA/7.0" wide type = WVGA)  
X: TFT color LCD (XGA)  
S: TFT color LCD (SVGA)  
C: TFT color LCD (VGA)  
T: TFT color LCD (VGA)

Wireless LAN I/F  
R: With wireless LAN I/F  
N/A: Without wireless LAN I/F

Extended wired LAN I/F  
L: With extended wired LAN I/F  
N/A: Without extended wired LAN I/F

Power supply  
D: 24V DC

Front case color  
B: Black  
N/A: Light grey





# HMI (Human Machine Interface)

## MONITOUCH TECHNOSHOT



### Powerful connectivity on bright TFT colour liquid crystal wide screens

With its sophisticated communication technology, the TECHNOSHOT series accelerates development in all industries. The programmable operation displays in the TECHNOSHOT series are user-friendly and have bright TFT colour liquid crystal wide screens.

Thanks to its powerful connectivity and endless features the TECHNOSHOT panels make the automation life easier.

### TS1000

Model	Display Size	Resolution	Specifications							Sound Output
			Touch Switch	Ethernet (LAN) Ports	Wireless LAN	Serial Ports	SD Card	USB type A & Mini B	VPN	
TS1100i	10.2" Wide	800 x 480	Resistive	1	-	3	-	Yes	-	-
TS1070	7" Wide	800 x 480	Resistive	-	-	3	-	Yes	-	-
TS1070i	7" Wide	800 x 480	Resistive	1	-	3	-	Yes	-	-

### TS2000

Model	Display Size	Resolution	Specifications							Sound Output
			Touch Switch	Ethernet (LAN) Ports	Wireless LAN	Serial Ports	SD Card	USB type A & Mini B	VPN	
TS2060	5.7"	320 x 240	Resistive	-	-	2	-	Only Mini B	-	-
TS2060i	5.7"	320 x 240	Resistive	1	-	3*	Yes	Yes	-	-

\*When optional unit DUR-00 is installed.

### TYPE CODE TS1000

TS1   0

Display size  
07: 7" wide  
10: 10.2" wide

Interface  
i: with built-in LAN port

### TYPE CODE TS2000

TS2 060

optional unit DUR-00 and CUR-XX can be attached  
SD/SDHC slot: 1 CH  
Ethernet: 1 CH  
USB type A: 1 port



# Cabinet Solution

## For HVAC/AQUA/MEGA/VG/Ace



Building on its technology and experience, Fuji Electric Europe has now developed its customized cabinet solution. Each Fuji Electric Cabinet Solution is designed based on the customer's needs. The customer selects the application, the inverter type, size and options, depending on their requirements and space. The cabinet solution is currently available for the series FRENIC-HVAC, FRENIC-AQUA, FRENIC-MEGA, FRENIC-VG stack, FRENIC-Ace.


- Compact IP54 for cost-efficient installation (IP44 optional on request)
- Up to 710 kW solutions
- EMC filter built-in
- DC Reactor always included
- 4 different cabinet topologies:
  - 1 inverter alone
  - 2 inverter + fuses
  - 3 inverter + main switch
  - 4 inverter + fuses + main switch
- Height selectable for some power sizes
- Keypad on door
- Up to 3 option cards (several fieldbuses, real time clock backup battery, D I/O, A I/O, Pt 100/1000 options)
- STO SIL2 / SIL3 depending on the series
- Rectifier or Active Front End selectable in case of SVG1S

### TYPE CODE

Inverter Selection

Cabinet Selection

**FRN 450 C SVG1S -69 E OPT- □ 1 □ R 1 D 54 K 22 MD**

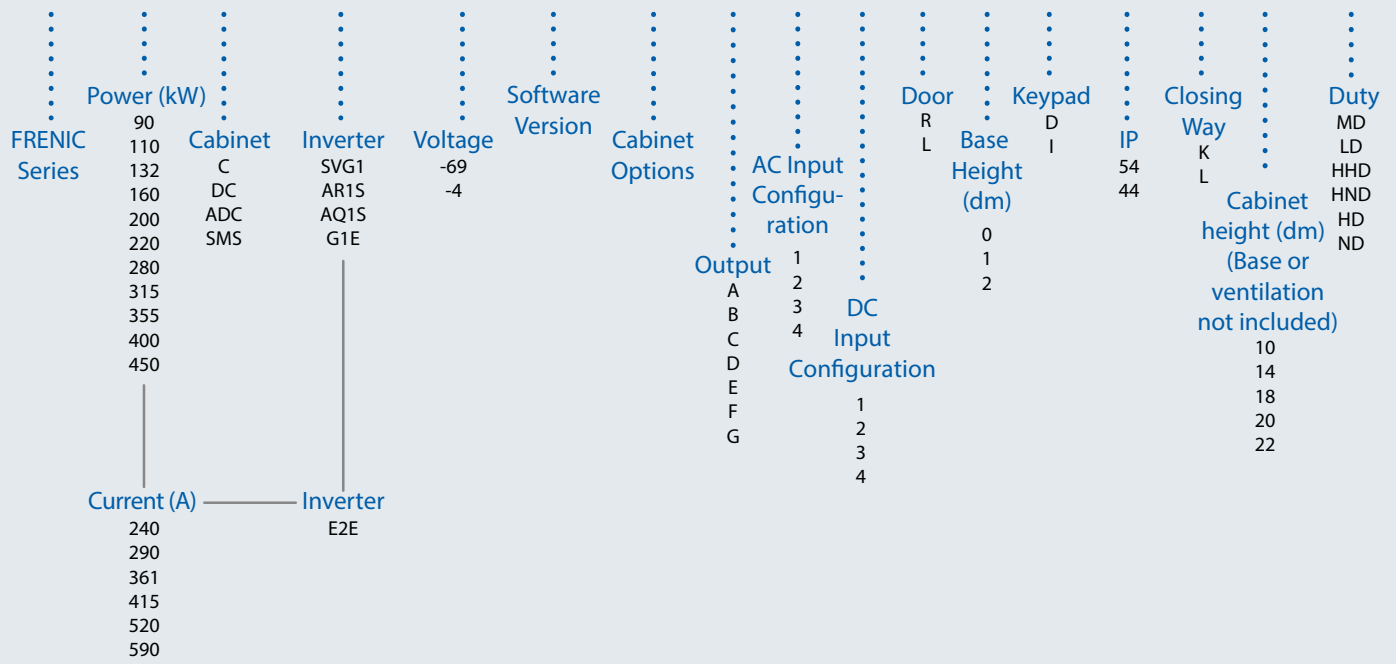

# NOTES

## CONTACT

### European Headquarters (Germany)

Fuji Electric Europe GmbH  
Goethering 58  
63067 Offenbach/Main  
Germany  
Tel.: +49 69 669029 0  
Fax: +49 69 669029 58  
info.inverter@fujielectric-europe.com  
www.fujielectric-europe.com

### Spain

Fuji Electric Europe GmbH  
Sucursal en España  
C/ Paletes 8, Edifici B, Planta 1, Oficina B  
Parc Tecnològic del Vallès  
08290 Cerdanyola del Vallès (Barcelona)  
Tel.: +34 93 5824333  
Fax: +34 93 5824344  
info.spain@fujielectric-europe.com

### United Kingdom

Fuji Electric Europe GmbH  
UK Branch  
Bedford i-Lab, Stannard Way  
Priory Business Park  
Bedford MK44 3RZ  
Tel.: +44 1234 834 768  
info.uk@fujielectric-europe.com

### Italy

Fuji Electric Europe GmbH  
Filiale Italiana  
Via Rizzotto 46  
41126 Modena (MO)  
Tel.: +39 059 4734266  
Fax: +39 059 4734294  
info.italy@fujielectric-europe.com  
www.fujielectric-europe.com

### Switzerland

Fuji Electric Europe GmbH  
Swiss Branch  
Rietlistraße 5  
9403 Goldach  
Tel.: +41 71 85829 49  
Fax: +41 71 85829 40  
info.swiss@fujielectric-europe.com

### France

Fuji Electric Europe GmbH  
Succursale France  
265 Rue Denis Papin  
38090 Villefontaine  
Tel.: +33 4 74 90 91 24  
Fax: +33 4 74 90 91 75  
info.france@fujielectric-europe.com

### Global Headquarters (Japan)

Fuji Electric Co., Ltd.  
Gate City Ohsaki East Tower  
11-2 Osaki 1-chome, Shinagawa-ku,  
Tokio 141-0032  
Tel.: +81 3 5435 7058  
Fax: +81 3 5435 7420  
www.fujielectric.com

