TECHNICAL DATA

Three Phase Electric Motors - Aluminum Frame
UMHA 132S-4 IE2
5.5 kW / 7.5 Cv
1455 RPM

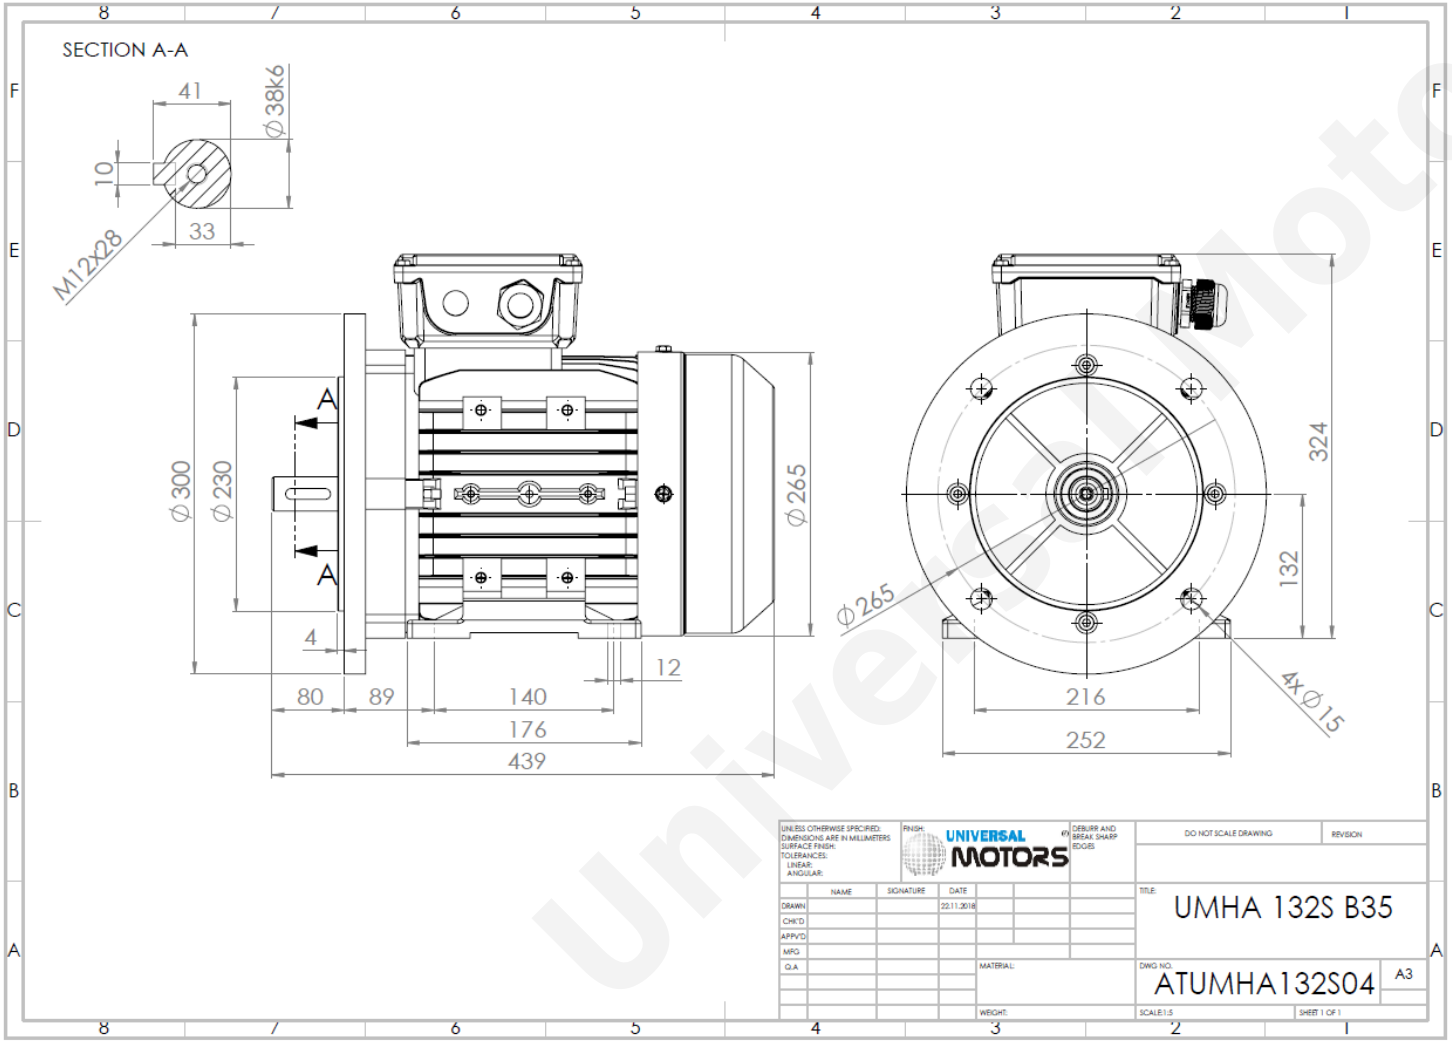

Motor type:	**UMHA 132S-4 IE2**
Output:	**5.5 kW / 7.5 Cv**
Speed (min^{-1}):	**1455 RPM**
Voltage:	**400 V**
Frequency:	**50 Hz**
Current:	**11.0 A**
Power factor (Cos Ø):	**0.82**
Poles:	**4**
Insulation class:	**F**
Temperature rise Class:	**B**
Efficiency 50%:	**87.7 %**
Efficiency 75%:	**88.0 %**
Efficiency 100%:	**87.7 %**
Torque:	**36.1 N.m**
Tstarting/Tnominal:	**2.0**
Istarting/Inominal:	**7.5**
Tmaximum/Tnominal:	**2.3**
Noise:	**75 Db(A)**
Weight:	**50.5 Kg**
Bearing DE:	**6308 2Z C3**
Bearing NDE:	**6308 2Z C3**

Regime - S1 **Altitude - 1000m** **Environment Temperature - 40ºC**

* References applied only in the UK

CONTACTS:
ACDC Drives Ltd
Units 96 C & D, Blackpole Trading Estate, Blackpole Road,
Worcester, WR3 8TJ

Tel: +44(0) 1905 887 667
Mail: sales@acdcdrives.co.uk